



Canon Inc.

imageRUNNER ADVANCE DX 527iFZ



Functional unit

Per unit product

System boundary

- final products intermediate products
- Raw Material acquisition, Production, Distribution
- Use & maintenance, and End-of-Life stage

Main specifications of the product

- Model name: imageRUNNER ADVANCE DX 527iFZ
- Specifications
- Multi Functional Printer (Electrophotography)
 - Print Speed : Up to 55 ipm (letter)
 - Duplex printing
 - Weight: approx. 46kg

Company Information

Canon Inc.
30-2, Shimomaruko 3-chome, Ohta-ku,
Tokyo 146-8501, Japan
+81-3-3758-2111

Registration#	JR-AI-20101C
PCR number	PA-590000-AI-03
PCR name	Imaging input and/or output equipment
Publication date	11/27/2020
Verification date	11/13/2020
Verification method	System certification
Verification#	JV-AI-20101C
Expiration date	11/12/2025
PCR review was conducted by:	
Approval date	11/8/2019
PCR review panel chair	Masayuki Kanzaki Sustainable Management Promotion Organization

Third party verifier*

Hiroyuki Uchida

Independent verification of data & declaration in accordance with ISO/TS14067

internal external

*Auditor's name is stated if system certification has been performed.



1. Quantification results, and contents of the declaration

CFP quantification unit : Per unit puroduct

Parameter			Unit
CFP Quantification result		910	kg-CO₂eq
Breakdown	Raw material acquisition stage	470	kg-CO ₂ eq
	Production stage	110	kg-CO ₂ eq
	Distribution stage	22	kg-CO ₂ eq
	Use & maintenance stage	240	kg-CO ₂ eq
	End-of-Life stage	61	kg-CO ₂ eq
Value on CFP mark		910	kg-CO₂eq
Unit for the value on CFP mark		Per unit product	


*Quantification results may slightly differ from the sum of the breakdown due to rounding of fractions.

3. Supplementary environmental information

Complies with the EU RoHS Directive (2011/65/EU) and its amendments including 2015/863/EU.

Manufactured at ISO 14001 certified factories.

2. Additional information

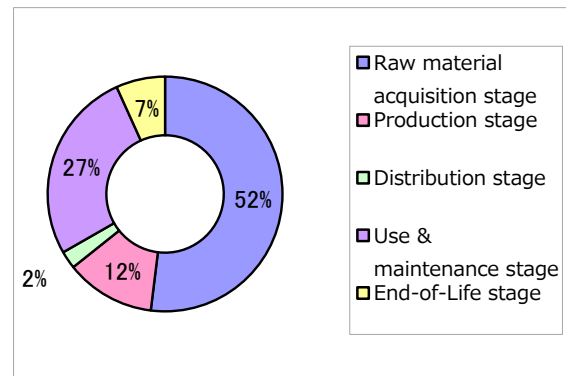

Calculated in the following conditions;

- Printing paper is not considered.
- The standard scenario for Multifunction Device (EP type).
- The applied Energy Star program version is 3.0.
- Print volume: 451,200 sheets.
- US market.

4. Interpretation

- CO2 emission in Raw material acquisition stage is the largest as 52%. It is also important to reduce the size and weight, and to use low environmental impact materials.
- CO2 emission in Use & maintenance stage is the second largest as 27%. It is important to save energy during product usage, to make the life time of consumables(e.g. drum) longer and to reduce amount of toner used when printing. The condition in this CFP evaluation can be different from the one which the user operates under. A choice of the use condition (print mode, print conditions and so on) can reduce the CO2 emission during Use & maintenance stage.
- We evaluated the CFP with Canon's own data of raw materials weight and the general basic unit for the parts because it is difficult to collect the data for a couple of thousands of parts. Accordingly, the results may be different from the specific product specification.
As such, please be advised that this result would be a rough estimate.

5. Assumptions of secondary data used

IDEA v2.1.3, and registered data of EcoLeaf Environmental Labeling Program, JLCA data v1.07 are used.

6. Remarks

—

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.
(Reference URL : <https://ecoleaf-label.jp/regulation/>)
- The CFP only addresses the single impact category of climate change and does not assess other potential social, economic and environmental impacts arising from the provision of a product.