

## Canon Inc.

## Japan EPD Program by SuMPO

Sustainable Management Promotion Organization 2-1, Kaji-cho 1 chome, Chiyoda-ku, Tokyo Japan https://ecoleaf-label.jp/

#### imageRUNNER ADVANCE DX 4825i DADF(For US)



%The Cassette Feeding Unit is not included.

## **Functional unit**

Per unit product

#### System boundary

■ final products □ intermediate products Raw Material acquisition, Production, Distribution, Use & maintenance, and End-of-Life stage

## Main specifications of the product

Model name: imageRUNNER ADVANCE DX 4825i DADF(For US) Specifications

•Multi Functional Printer (Electrophotography)

- •Print Speed : Up to 25 ipm (A4)
- Duplex printing

•Weight: approx.66.1kg(Toner bottle not included)

## **Company Information**

#### Canon Inc.

30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo 146-8501, Japan +81-3-3758-2111

Registration#	JR-AI-22051C		
PCR number	PA-590000-AI-04		
PCR name	Imaging input and/or output equipment		
Publication date	10/28/2022		
Verification date	10/17/2022		
Verification method	System certificaion		
Verification#	JV-AI-22051C		
<b>Expiration date</b>	10/16/2027		
PCR review was conducted by:			
Approval date	4/1/2022		
PCR review panel chair	Masayuki Kanzaki		
	Sustainable Management Promotion Organization		
Third party verifier*			

#### Hiroyuki Uchida

Independent verification of data & declaration in accordance with ISO/TS14067

#### □internal ■external

\*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-22051C



# Carbon Footprint of Products **CFP** Declaration

#### Registration number : JR-AI-22051C

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization 2-1, Kaji-cho 1 chome, Chiyoda-ku, Tokyo Japan https://ecoleaf-label.jp/

3. Supplementary environmental information

·Complies with the EU RoHS Directive (2011/65/EU) and its amendments

Manufactured at ISO 14001 certified


including 2015/863/EU.

factories.

1. Quantification results, and contents of the declaration				
CFP quantification unit : Per unit puroduct				
Parameter			Unit	
CFP Quantification results		900	kg-CO <sub>2</sub> eq	
Breakdown	Raw material acquisition	670	kg-CO <sub>2</sub> eq	
	Production	24	kg-CO <sub>2</sub> eq	
	Distribution	57	kg-CO <sub>2</sub> eq	
	Use & maintenance	55	kg-CO <sub>2</sub> eq	
	End-of-Life	92	kg-CO <sub>2</sub> eq	
Value on CFP mark		900	kg-CO <sub>2</sub> eq	
Unit for the value on CFP mark		Per unit puroduct		

\*Quantification results may slightly differ from the sum of the breakdown

due to rounding of fractions.

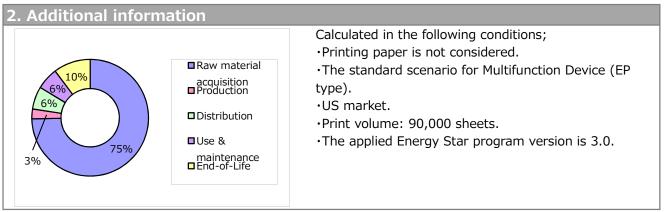

#### 4. Interpretation

•CO2 emission in Raw material acquisition is the largest as 75%. It is important to reduce the size and weight, and to use low environmental impact materials.

•CO2 emission in End-of-Life is the second largest as 10%. It is important to reduce the size and weight, and improving recycling rates.

•We evaluated the CFP with Canon's own data of raw materials weight and the general basic unit for the parts because it is difficult to collect the data for a couple of thousands of parts. Accordingly, the results may be different from the specific product specification.

As such, please be advised that this result would be a rough estimate.

# 5. Assumptions of secondary data used

IDEA v2.1.3, and registered data of Japan EPD Program by SuMPO, JLCA data v1.10 are used.

## 6. Remarks

- For data quantification, please refer to PCR and Rules on quantification and declaration.

- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied. (Reference URL : https://ecoleaf-label.jp/regulation/)

- The CFP only addresses the single impact category of climate change and does not assess other potential social, economic and environmental impacts arising from the provision of a product.