

# Carbon Footprint of Products

## CFP Declaration

Registration number : JR-AI-23449C

# Japan EPD Program by SuMPO

Sustainable Management Promotion Organization  
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan  
<https://ecoleaf-label.jp/>

Canon Inc.

i-SENSYS MF655Cdw(For EU)



### Functional unit

Per unit product

### System boundary

final products       intermediate products

Raw Material acquisition, Production, Distribution, Use & maintenance, and End-of-Life stage

### Main specifications of the product

Model name

i-SENSYS MF655Cdw(For EU)

Specifications

- Multi Functional Printer (Electrophotography)
- CL
- Print Speed : Up to 21 ipm (A4)
- Max paper size : Legal (LGL)
- Print/copy/scan/Duplex printing/ADF
- Weight: approx.28.9kg(Cartridge included)

### Company Information

Canon Inc.

30-2, Shimomaruko 3-chome, Ohta-ku,

Tokyo 146-8501, Japan

+81-3-3758-2111

|                                     |   |
|-------------------------------------|---|
| Registration#                       | JR-AI-23449C  |
| PCR number                          | PA-590000-AI-08   |
| PCR name                            | Imaging input and/or output equipment                             |
| Publication date                    | 12/7/2023   |
| Verification date                   | 12/4/2023   |
| Verification method                 | Product-by-product  |
| Verification#                       | JV-AI-23449   |
| Expiration date                     | 12/3/2028   |
| <b>PCR review was conducted by:</b> |   |
| Approval date                       | 9/1/2023  |
| PCR review panel chair              | Masayuki Kanzaki<br>Sustainable Management Promotion Organization |
| <b>Third party verifier*</b>        |   |
|                                     | Kazuo Naito   |

Independent verification of data & declaration in accordance with ISO/TS14067

internal

external

\*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-23449C



1. Quantification results, and contents of the declaration

CFP quantification unit :


| Parameter                             |                          |                         | Unit                       |
|---------------------------------------|--------------------------|-------------------------|----------------------------|
| <b>CFP Quantification results</b>     |                          | <b>1000</b>             | <b>kg-CO<sub>2</sub>eq</b> |
| Breakdown                             | Raw material acquisition | 270                     | kg-CO <sub>2</sub> eq      |
|                                       | Production               | 9.7                     | kg-CO <sub>2</sub> eq      |
|                                       | Distribution             | 28                      | kg-CO <sub>2</sub> eq      |
|                                       | Use & maintenance        | 670                     | kg-CO <sub>2</sub> eq      |
|                                       | End-of-Life              | 37                      | kg-CO <sub>2</sub> eq      |
| <b>Value on CFP mark</b>              |                          | <b>1000</b>             | <b>kg-CO<sub>2</sub>eq</b> |
| <b>Unit for the value on CFP mark</b> |                          | <b>Per unit product</b> |                            |

\*Quantification results may slightly differ from the sum of the breakdown due to rounding of fractions.

3. Supplementary environmental information

- Complies with the EU RoHS Directive (2011/65/EU) and its amendments including 2015/863/EU.
- Manufactured at ISO 14001 certified factories.

2. Additional information

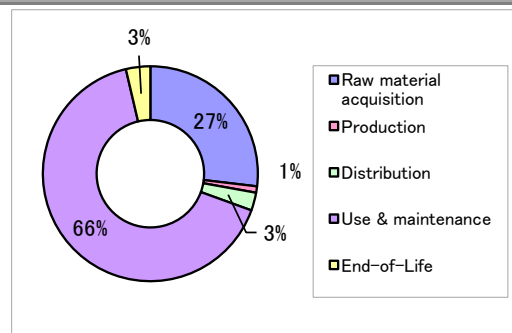

Calculated in the following conditions;

- Printing paper is not considered.
- The standard scenario for Multifunction Device (EP type).
- UK / France / Germany / Italy / Spain / Portugal / Belgium / Netherland / Austria / Switzerland / Denmark / Sweden / Norway / Finland market.
- Print volume: 63,000 sheets.
- The applied Energy Star program version is 3.0.

4. Interpretation

- CO<sub>2</sub> emission in Use & maintenance is the largest as 66%. It is important to save energy during product usage, to make the life time of consumables(e.g. drum) longer and to reduce amount of toner used when printing. The condition in this CFP evaluation can be different from the one which the user operates under. A choice of the use condition (print mode, print conditions and so on) can reduce the CO<sub>2</sub> emission during Use & maintenance stage.
  - CO<sub>2</sub> emission in Raw material acquisition is the second largest as 27%. It is important to reduce the size and weight, and to use low environmental impact materials.
  - We evaluated the CFP with Canon's own data of raw materials weight and the general basic unit for the parts because it is difficult to collect the data for a couple of thousands of parts. Accordingly, the results may be different from the specific product specification.
- As such, please be advised that this result would be a rough estimate.

5. Assumptions of secondary data used

IDEA v2.1.3, and registered data v1.13 of Japan EPD Program by SuMPO are used.

6. Remarks

-

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied. (Reference URL : <https://ecoleaf-label.jp/regulation/>)
- The CFP only addresses the single impact category of climate change and does not assess other potential social, economic and environmental impacts arising from the provision of a product.