



EcoLeaf

Type III Environmental Declaration (EPD)

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>

Registration number : JR-AI-23278E



A3 Color Multifunction Printer

OFISTAR F6500C

FUJIFILM
Value from Innovation

富士フイルム ビジネス イノベーション株式会社
FUJIFILM Business Innovation Corp.

The image above shows FUJIFILM "Apeos C6570", and the actual product is labeled "OFISTAR F6500C".

Apeos, Apeos logo and ApeosPlus are registered trademarks or trademarks of FUJIFILM Business Innovation Corp. in Japan and/or other countries

Functional unit

Per unit of product

System boundary

■ final products intermediate products

Raw material acquisition, Production, Distribution,
Use & Maintenance, End-of-Life

Main specifications of the product

- Model: OFISTAR F6500C
- Color Multifunction Printer (EP Type)
- Print Speed (A4 LEF): Color 65ppm, Monochrome 65ppm
- Paper Size (Max.): SRA3(320x450mm)
- Copy / Print / Scan / Fax
- Automatic 2 Sided Output,
Automatic Document Feeder

Company Information

FUJIFILM Business Innovation Corp.

6-1 Minatomirai, Nishi-ku, Yokohama-shi, Kanagawa Japan

<https://www.fujifilm.com/fbglobal/eng>

Registration#	JR-AI-23278E
PCR number	PA-590000-AI-08
PCR name	Imaging input and/or output equipment
Publication date	11/14/2023
Verification date	10/26/2023
Verification method	System certifaicon
Verification#	2023-FB-EL-31
Expiration date	10/25/2028

PCR review was conducted by:

Approval date	9/1/2023
PCR review panel chair	Masayuki Kanzaki Sustainable Management Promotion Organization

Third party verifier*

Sachiko Hashizume

Independent verification of data & declaration in
accordance with ISO14025


internal external

*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-23278E



1. Results of life cycle impact assessment (LCIA)

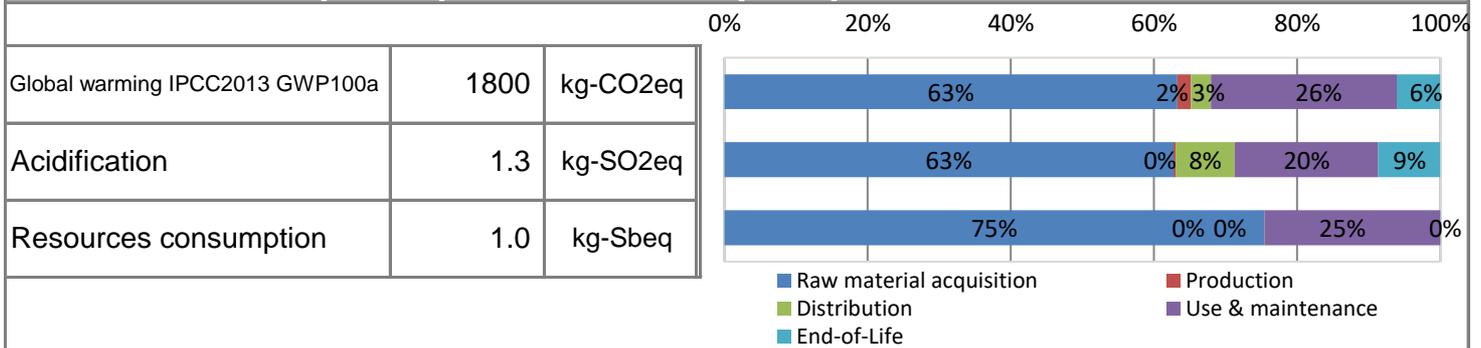

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO ₂ eq	1.8E+03	1.1E+03	3.4E+01	5.0E+01	4.6E+02	1.1E+02
Acidification		kg-SO ₂ eq	1.3E+00	8.2E-01	3.6E-03	1.1E-01	2.6E-01	1.1E-01
Resources consumption		kg-Sbeq	1.0E+00	7.7E-01	1.5E-04	2.1E-04	2.5E-01	2.1E-04

2. Life cycle inventory analysis (LCI)

Parameter	Value	Unit
Non-renewable material resources	1.5E+02	kg
Renewable material resources	3.6E+02	kg

3. Material composition

Material	Value	Unit
Steel	80	kg
SUS	1.2	kg
Aluminium	0.90	kg
Other Metals	9.2	kg
Plastic	42	kg
Rubber	0.24	kg
Glass	2.5	kg
Paper, Wood	9.3	kg
Circuit Board	6.0	kg
Conversion Parts	9.6	kg
Others	4.7	kg

5. Additional explanation

- ✓ Product destination: Japan
- ✓ Calculated based on standard scenario for MFP (EP Type).
- ✓ Printing paper is excluded from Use & maintenance stage.
- ✓ Electric power of Use & maintenance stage is calculated based on TEC value, measured according to ENERGY STAR® Version 3.0.
- ✓ Assumed print volume are 633,600 sheets.
1/4 × 32 (jobs per day) × 66 (sheets per job) × 5 (days) × 4 (weeks) × 12 (months) × 5 (years) = 633,600 (sheets)



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-23278E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan
<https://ecoleaf-label.jp/>

6-1. Supplementary environmental information

ENERGY STAR® Ver.3.0 qualified.

7. Assumptions of secondary data used

Inventory Database: LCI Database IDEA v2.1.3, Japan EPD Program by SuMPO registered data v1.13.

8. Remarks

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

Registration number : JR-AI-23278E