



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24129E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan
<https://ecoleaf-label.jp/>

Canon Inc.

imageRUNNER ADVANCE DX 4925i(For AU)



※The Cassette Feeding Unit is excluded.

Functional unit

Per unit product

System boundary

final products intermediate products
Raw Material acquisition, Production, Distribution,
Use & maintenance, and End-of-Life stage

Main specifications of the product

Model name

imageRUNNER ADVANCE DX 4925i(For AU)

Specifications

- Multi Functional Printer (Electrophotography)
- BW
- Print Speed : Up to 25 ipm (A4)
- Max paper size : 320 x 450mm(SRA3)
- Print/copy/scan/Duplex printing/ADF
- Weight: approx.73.52kg(Toner bottle not included)

Company Information

Canon Inc.
30-2, Shimomaruko 3-chome, Ohta-ku,
Tokyo 146-8501, Japan +81-3-3758-2111

Registration#	JR-AI-24129E
PCR number	PA-590000-AI-08
PCR name	Imaging input and/or output equipment
Publication date	3/27/2024
Verification date	3/21/2024
Verification method	Product-by-product
Verification#	JV-AI-24129
Expiration date	3/20/2029
PCR review was conducted by:	
Approval date	9/1/2023
PCR review panel chair	Masayuki Kanzaki Sustainable Management Promotion Organization

Third party verifier*

Kazuo Naito

Independent verification of data & declaration in accordance with ISO14025


internal external

*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-24129E



1. Results of life cycle impact assessment (LCIA)

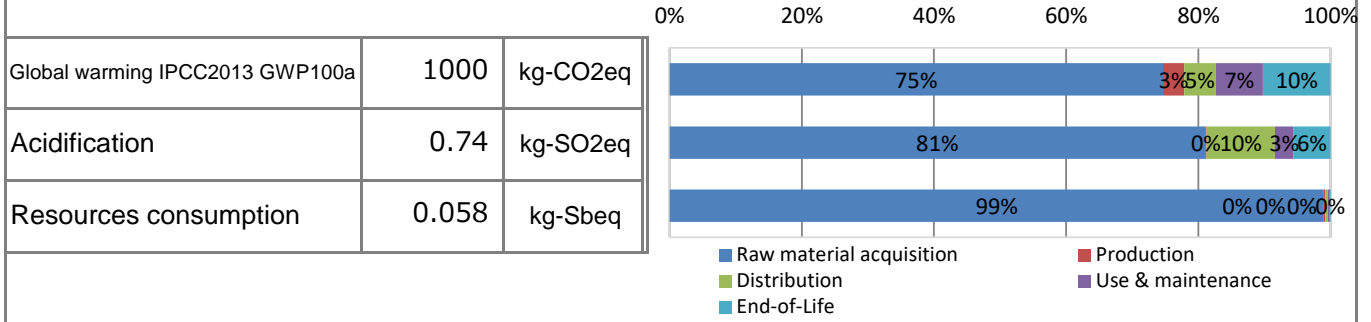

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO ₂ eq	1.0E+03	7.5E+02	3.2E+01	4.8E+01	7.1E+01	1.0E+02
Ozone layer destruction		kg-CFC-11eq	8.1E-05	7.9E-05	4.0E-10	4.1E-10	5.1E-07	1.0E-06
Acidification		kg-SO ₂ eq	7.4E-01	6.0E-01	1.7E-03	7.7E-02	2.1E-02	4.2E-02
Resources consumption		kg-Sbeq	5.8E-02	5.7E-02	1.3E-04	2.0E-04	2.0E-04	6.3E-05

2. Life cycle inventory analysis (LCI)

Parameter	Unit	Value
Non-renewable energy resources	MJ	1.5E+04
Renewable primary energy	MJ	2.4E+02

3. Material composition

Material	Value	Unit
Common Steel	34	%
Stainless Steel	0.35	%
Aluminium	0.63	%
Other Metal	2.0	%
Plastic	32	%
Rubber	0.68	%
Glass	2.5	%
Paper/Wood	20	%
Circuit Board	3.2	%
Others	4.9	%



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24129E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>

5. Additional explanation

Calculated in the following conditions;

- Printing paper is not considered.
- Expected use period is 5 years.
- The standard scenario for Multifunction Device (EP type).
- Australia market.
- Print volume: 90,000 sheets.
- The applied Energy Star program version is 3.0.

6-1. Supplementary environmental information

Complies with the EU RoHS Directive (2011/65/EU) and its amendments including 2015/863/EU.

Manufactured at ISO 14001 certified factories.

7. Assumptions of secondary data used

IDEA v2.1.3, and registered data v1.13 of Japan EPD Program by SuMPO are used.

8. Remarks

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

Registration number : JR-AI-24129E