



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24170E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization  
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan  
<https://ecoleaf-label.jp/>

Canon Inc.

imageRUNNER ADVANCE DX C359i(For NZ)



### Functional unit

Per unit product

### System boundary

■ final products      □ intermediate products

Raw Material acquisition, Production, Distribution,  
Use & maintenance, and End-of-Life stage

### Main specifications of the product

Model name

imageRUNNER ADVANCE DX C359i(For NZ)

Specifications

- Multi Functional Printer (Electrophotography)
- CL
- Print Speed : Up to 35 ipm (A4)
- Max paper size : LGL
- Print/copy/scan/Duplex printing/ADF
- Weight: approx.48kg(Toner bottle not included)

### Company Information

Canon Inc.

30-2, Shimomaruko 3-chome, Ohta-ku,  
Tokyo 146-8501, Japan +81-3-3758-2111

Registration#	JR-AI-24170E
PCR number	PA-590000-AI-08
PCR name	Imaging input and/or output equipment
Publication date	4/12/2024
Verification date	4/9/2024
Verification method	Product-by-product
Verification#	JV-AI-24170
Expiration date	4/8/2029
PCR review was conducted by:	
Approval date	9/1/2023
PCR review panel chair	Masayuki Kanzaki Sustainable Management Promotion Organization

### Third party verifier\*

Kazuo Naito

Independent verification of data & declaration in  
accordance with ISO14025

internal       external

\*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-24170E



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24170E


Japan EPD Program by SuMPO

Sustainable Management Promotion Organization

14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>

### 1. Results of life cycle impact assessment (LCIA)

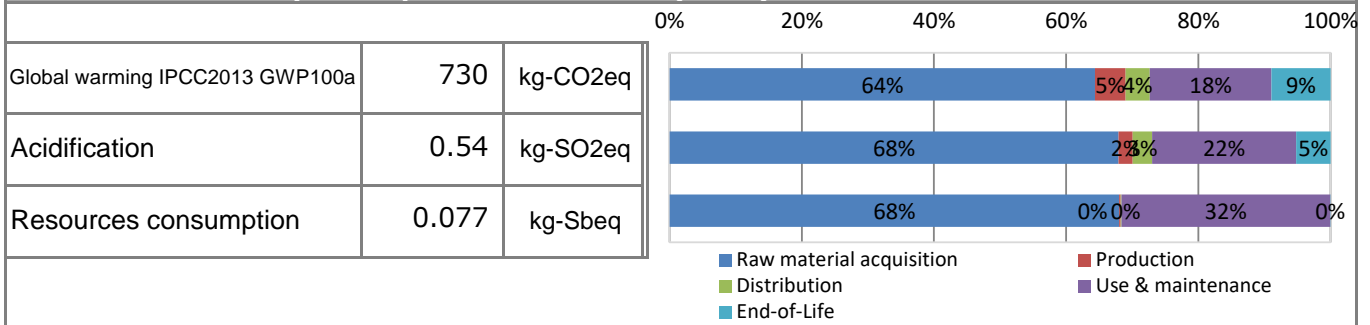

Parameter	stage	Unit	Total	Life Cycle Stage				
				Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO <sub>2</sub> eq	7.3E+02	4.7E+02	3.4E+01	2.7E+01	1.3E+02	6.5E+01
Ozone layer destruction		kg-CFC-11eq	7.6E-05	5.7E-05	6.1E-10	1.8E-10	1.8E-05	6.4E-07
Acidification		kg-SO <sub>2</sub> eq	5.4E-01	3.6E-01	1.2E-02	1.6E-02	1.2E-01	2.8E-02
Resources consumption		kg-Sbeq	7.7E-02	5.2E-02	1.5E-04	1.1E-04	2.4E-02	3.8E-05

### 2. Life cycle inventory analysis (LCI)

Parameter	Value	Unit
Non-renewable energy resources	1.1E+04	MJ
Renewable primary energy	8.1E+02	MJ

### 3. Material composition

Material	Value	Unit
Common Steel	29	%
Stainless Steel	0.60	%
Aluminium	0.47	%
Other Metal	2.1	%
Plastic	35	%
Rubber	0.60	%
Glass	1.7	%
Paper/Wood	19	%
Circuit Board	3.9	%
Others	7.5	%



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24170E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization

14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>

## 5. Additional explanation

Calculated in the following conditions;

- Printing paper is not considered.
- Expected use period is 5 years.
- The standard scenario for Multifunction Device (EP type).
- New Zealand market.
- Print volume: 182,400 sheets.
- The applied Energy Star program version is 3.0.

## 6-1. Supplementary environmental information

Complies with the EU RoHS Directive (2011/65/EU) and its amendments including 2015/863/EU.

Manufactured at ISO 14001 certified factories.

## 7. Assumptions of secondary data used

IDEA v2.1.3, and registered data v1.13 of Japan EPD Program by SuMPO are used.

## 8. Remarks

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.  
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

Registration number : JR-AI-24170E