



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24171E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization

14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>

Canon Inc.

imageRUNNER ADVANCE DX C359P(For EU)



Functional unit

Per unit product

System boundary

final products intermediate products

Raw Material acquisition, Production, Distribution, Use & maintenance, and End-of-Life stage

Main specifications of the product

Model name

imageRUNNER ADVANCE DX C359P(For EU)

Specifications

- Printer (Electrophotography)
- CL
- Print Speed : Up to 35 ipm (A4)
- Max paper size : LGL
- Print/Duplex printing
- Weight: approx.40kg(Toner bottle not included)

Company Information

Canon Inc.

30-2, Shimomaruko 3-chome, Ohta-ku,

Tokyo 146-8501, Japan +81-3-3758-2111

Registration#	JR-AI-24171E
PCR number	PA-590000-AI-08
PCR name	Imaging input and/or output equipment
Publication date	4/12/2024
Verification date	4/9/2024
Verification method	Product-by-product
Verification#	JV-AI-24171
Expiration date	4/8/2029
PCR review was conducted by:	
Approval date	9/1/2023
PCR review panel chair	Masayuki Kanzaki Sustainable Management Promotion Organization

Third party verifier*

Kazuo Naito

Independent verification of data & declaration in accordance with ISO14025

internal external

*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-24171E



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24171E


Japan EPD Program by SuMPO

Sustainable Management Promotion Organization

14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>

1. Results of life cycle impact assessment (LCIA)

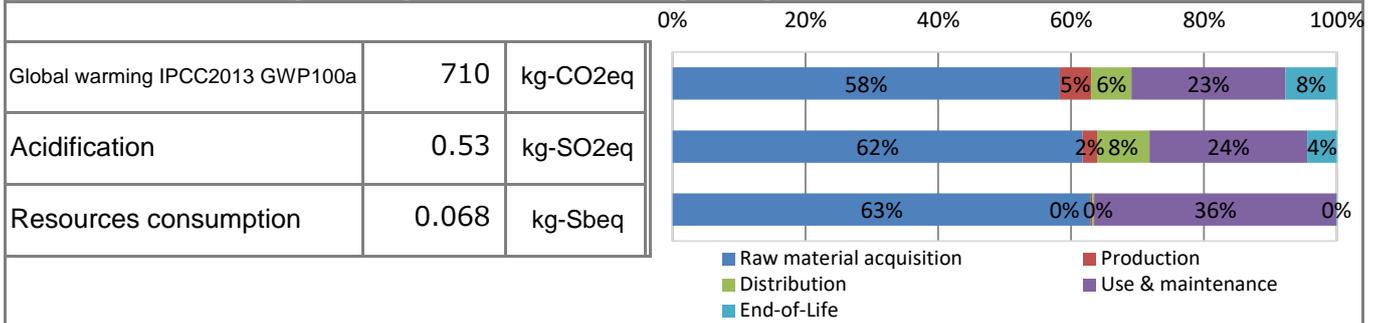

Parameter	stage	Unit	Total	Life Cycle Stage				
				Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO ₂ eq	7.1E+02	4.2E+02	3.4E+01	4.3E+01	1.7E+02	5.5E+01
Ozone layer destruction		kg-CFC-11eq	7.0E-05	5.1E-05	6.1E-10	3.0E-10	1.8E-05	5.0E-07
Acidification		kg-SO ₂ eq	5.3E-01	3.3E-01	1.2E-02	4.2E-02	1.3E-01	2.4E-02
Resources consumption		kg-Sbeq	6.8E-02	4.3E-02	1.5E-04	1.8E-04	2.5E-02	3.9E-05

2. Life cycle inventory analysis (LCI)

Parameter	Value	Unit
Non-renewable energy resources	1.1E+04	MJ
Renewable primary energy	1.9E+02	MJ

3. Material composition

Material	Value	Unit
Common Steel	27	%
Stainless Steel	0.24	%
Aluminium	0.55	%
Other Metal	1.6	%
Plastic	36	%
Rubber	0.54	%
Glass	0.40	%
Paper/Wood	22	%
Circuit Board	4.4	%
Others	7.4	%



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24171E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan
<https://ecoleaf-label.jp/>

5. Additional explanation

Calculated in the following conditions;

- Printing paper is not considered.
- Expected use period is 5 years.
- The standard scenario for Printer (EP type).
- UK / France / Germany / Italy / Spain / Portugal / Belgium / Netherland / Austria / Switzerland / Denmark / Sweden / Norway / Finland market.
- Print volume: 182,400 sheets.
- The applied Energy Star program version is 3.0.

6-1. Supplementary environmental information

Complies with the EU RoHS Directive (2011/65/EU) and its amendments including 2015/863/EU.

Manufactured at ISO 14001 certified factories.

7. Assumptions of secondary data used

IDEA v2.1.3, and registered data v1.13 of Japan EPD Program by SuMPO are used.

8. Remarks

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

Registration number : JR-AI-24171E