



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24152E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan
<https://ecoleaf-label.jp/>

Canon Inc.

imageCLASS LBP6030w(For US)



Functional unit

Per unit product

System boundary

final products intermediate products

Raw Material acquisition, Production, Distribution,
Use & maintenance, and End-of-Life stage

Main specifications of the product

Model name

imageCLASS LBP6030w(For US)

Specifications

- Printer (Electrophotography)
- BW
- Print Speed : Up to 19 ipm (LTR)
- Max paper size : LGL
- Print
- Weight: approx.5kg(CRG not included)

Company Information

Canon Inc.

30-2, Shimomaruko 3-chome, Ohta-ku,
Tokyo 146-8501, Japan +81-3-3758-2111

Registration#	JR-AI-24152E
PCR number	PA-590000-AI-08
PCR name	Imaging input and/or output equipment
Publication date	4/22/2024
Verification date	4/15/2024
Verification method	System certificaion
Verification#	JV-AI-24152
Expiration date	4/14/2029
PCR review was conducted by:	
Approval date	9/1/2023
PCR review panel chair	Masayuki Kanzaki Sustainable Management Promotion Organization

Third party verifier*

internal external

Hiroyuki Uchida

Independent verification of data & declaration in accordance
with ISO14025


internal external

*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-24152E



1. Results of life cycle impact assessment (LCIA)

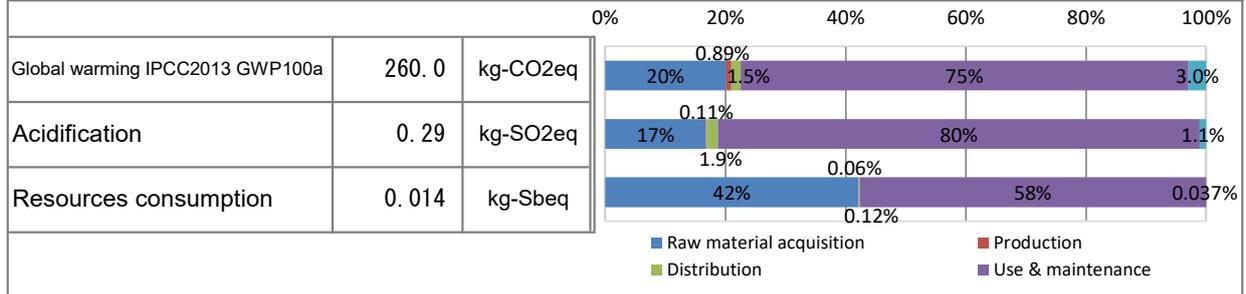

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO ₂ eq	2.6E+02	5.2E+01	2.3E+00	4.0E+00	1.9E+02	7.8E+00
Ozone layer destruction		kg-CFC-11eq	4.2E-05	5.6E-06	4.8E-11	5.4E-11	3.6E-05	7.0E-08
Acidification		kg-SO ₂ eq	2.9E-01	4.9E-02	3.1E-04	5.4E-03	2.3E-01	3.2E-03
Resources consumption		kg-Sbeq	1.4E-02	6.0E-03	8.5E-06	1.7E-05	8.2E-03	5.3E-06

2. Life cycle inventory analysis (LCI)

Parameter	Unit
Non-renewable energy resources	4.0E+03 MJ
Renewable primary energy	8.1E+01 MJ

3. Material composition

Material	Unit
Common Steel	37 %
Stainless Steel	0.15 %
Aluminium	0.79 %
Other Metal	5.4 %
Plastic	41 %
Rubber	0.29 %
Glass	0.33 %
Paper/Wood	11 %
Circuit Board	4.3 %
Others	1.0 %

5. Additional explanation

- Calculated in the following conditions;
- Printing paper is not considered.
 - Expected use period is 5 years.
 - The standard scenario for Printer (EP type).
 - US market.
 - Print volume: 51,300 sheets.
 - The applied Energy Star program version is 3.0.



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24152E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization

14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>

6-1. Supplementary environmental information

Complies with the EU RoHS Directive (2011/65/EU) and its amendments including 2015/863/EU.

Manufactured at ISO 14001 certified factories.

7. Assumptions of secondary data used

IDEA v2.1.3, and registered data v1.13 of Japan EPD Program by SuMPO are used.

8. Remarks

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

Registration number : JR-AI-24152E