



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24174E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization

14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>

Canon Inc.

imageRUNNER ADVANCE DX 527i(For AU)



### Functional unit

Per unit product

### System boundary

final products       intermediate products

Raw Material acquisition, Production, Distribution,  
Use & maintenance, and End-of-Life stage

### Main specifications of the product

Model name

imageRUNNER ADVANCE DX 527i(For AU)

Specifications

- Multi Functional Printer (Electrophotography)
- BW
- Print Speed : Up to 52 ipm (A4)
- Max paper size : A4
- Print/copy/scan/FAX/Duplex printing/ADF
- Weight: approx.34.00kg(All in one Cartridge not included)

### Company Information

Canon Inc.

30-2, Shimomaruko 3-chome, Ohta-ku,

Tokyo 146-8501, Japan +81-3-3758-2111

Registration#	JR-AI-24174E
PCR number	PA-590000-AI-08
PCR name	Imaging input and/or output equipment
Publication date	4/17/2024
Verification date	4/12/2024
Verification method	Product-by-product
Verification#	JV-AI-24174
Expiration date	4/11/2029
PCR review was conducted by:	
Approval date	9/1/2023
PCR review panel chair	Masayuki Kanzaki Sustainable Management Promotion Organization

### Third party verifier\*

internal       external

Independent verification of data & declaration in accordance with ISO14025

internal       external

\*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-24174E



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24174E


Japan EPD Program by SuMPO

Sustainable Management Promotion Organization

14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>

### 1. Results of life cycle impact assessment (LCIA)

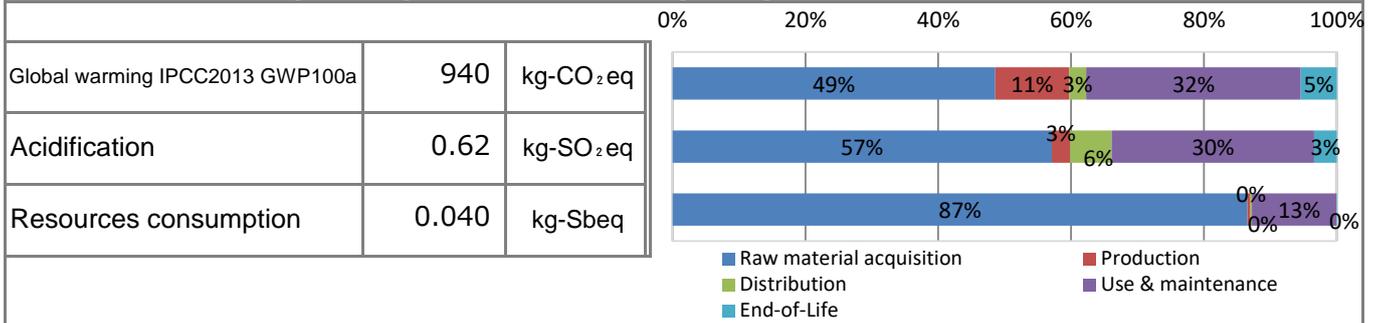

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO <sub>2</sub> eq	9.4E+02	4.6E+02	1.0E+02	2.4E+01	3.0E+02	5.1E+01
Ozone layer destruction		kg-CFC-11eq	8.4E-05	4.2E-05	4.3E-08	1.8E-10	4.1E-05	4.4E-07
Acidification		kg-SO <sub>2</sub> eq	6.2E-01	3.6E-01	1.7E-02	3.9E-02	1.9E-01	2.1E-02
Resources consumption		kg-Sbeq	4.0E-02	3.5E-02	1.8E-04	1.0E-04	5.1E-03	2.9E-05

### 2. Life cycle inventory analysis (LCI)

Parameter	Value	Unit
Non-renewable energy resources	1.4E+04	MJ
Renewable primary energy	2.7E+02	MJ

### 3. Material composition

Material	Value	Unit
Common Steel	26	%
Stainless Steel	0.58	%
Aluminium	0.24	%
Other Metal	2.2	%
Plastic	33	%
Rubber	1.1	%
Glass	1.6	%
Paper/Wood	28	%
Circuit Board	4.2	%
Others	3.4	%



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24174E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization

14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>

## 5. Additional explanation

Calculated in the following conditions;

- Printing paper is not considered.
- Expected use period is 5 years.
- The standard scenario for Multifunction Device (EP type).
- Australia market.
- Print volume: 403,200 sheets.
- The applied Energy Star program version is 3.0.

## 6-1. Supplementary environmental information

Complies with the EU RoHS Directive (2011/65/EU) and its amendments including 2015/863/EU.

Manufactured at ISO 14001 certified factories.

## 7. Assumptions of secondary data used

IDEA v2.1.3, and registered data v1.13 of Japan EPD Program by SuMPO are used.

## 8. Remarks

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.  
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

Registration number : JR-AI-24174E