



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24117E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization

14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>

KONICAMINOLTA ,INC.

bizhub C651i



(Photo : Mounted option-unit(PC-417) is not included in the calculation.)

Functional unit

Per unit of product

System boundary

- final products intermediate products

Raw material acquisition, Production, Distribution, Use & maintenance, End-of-Life

Main specifications of the product

Model name : bizhub C651i

- Marking technologies : Electrophotographic Printer (EP)
- Printing speed(A4) : Monochrome 65 ppm
Color 65 ppm

- Printing paper : Maximum A3
- Duplex function : Standard

Company Information

Please direct any inquiries or comments to e-mail: eco-support@konicaminolta.com

Registration#	JR-AI-24117E
PCR number	PA-590000-AI-08
PCR name	Imaging input and/or output equipment
Publication date	6/10/2024
Verification date	5/31/2024
Verification method	System certificaion
Verification#	JV-AI-24117
Expiration date	5/30/2029
PCR review was conducted by:	
Approval date	9/1/2023
PCR review panel chair	Masayuki Kanzaki (Sustainable Management Promotion Organization)

Third party verifier*

Kazuo Naitou

Independent verification of data & declaration in accordance with ISO14025


internal external

*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-24117E



1. Results of life cycle impact assessment (LCIA)

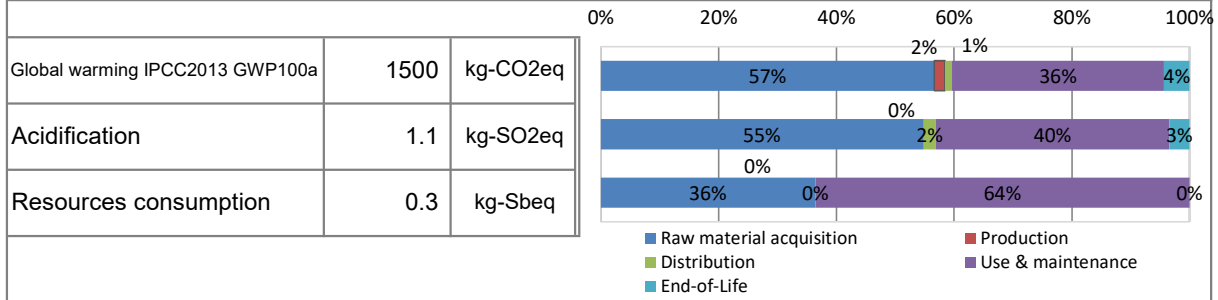

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO ₂ eq	1.5E+03	8.2E+02	2.6E+01	1.8E+01	5.2E+02	6.3E+01
Acidification		kg-SO ₂ eq	1.1E+00	6.2E-01	2.0E-03	2.3E-02	4.5E-01	3.9E-02
Resources consumption		kg-Sbeq	3.0E-01	1.1E-01	3.8E-05	6.6E-05	1.9E-01	8.4E-05

2. Life cycle inventory analysis (LCI)

Parameter	Value	Unit
Non-renewable material resources	9.0E+01	kg
Renewable material resources	2.2E+02	kg

3. Material composition

Material	Value	Unit
Steel	4.8E+01	kg
SUS	9.3E-01	kg
Al	8.2E-01	kg
Other metals	2.8E+00	kg
Glass	2.0E+00	kg
Thermoplastics resin	3.7E+01	kg
Wood	5.5E+00	kg
Paper	8.3E+00	kg
Rubber	5.6E-01	kg
Assembled circuit board	4.6E+00	kg
Medium-sized motor	7.1E+00	kg



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24117E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization

14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>

5. Additional explanation

- Production destination : Japan
- Calculation method of use stage (Caluclated by the standard scenario for MFP (EP type))
- Expected usage period : five years
- Estimated number of sheets used : 633,600
- The impact of printing paper is not included
- The impact of expendables and Maintenance parts are included in the stage of Use&maintenance.

※ Conformed to the International ENERGY STAR® Ver3.0 Program

6-1. Supplementary environmental information

- ENERGY STAR® Ver.3.0 qualified

7. Assumptions of secondary data used

IDEA v2.1.3 and Ecoleaf Enviromental Labeling Program Registry data v1.10

8. Remarks

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

Registration number : JR-AI-24117E