# Japan EPD Program by SuMPO

Sustainable Management Promotion Organization 14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan https://ecoleaf-label.jp/

Canon Inc.

imageRUNNER ADVANCE DX C568iF(For US)



#### **Functional unit**

Per unit product

## **System boundary**

■ final products □intermediate products

Raw Material acquisition, Production, Distribution,

Use & maintenance, and End-of-Life stage

# **Main specifications of the product**

Model name

imageRUNNER ADVANCE DX C568iF(For US)

# Specifications

- Multi Functional Printer (Electrophotography)
- ·CL
- Print Speed : Up to 60 ipm (LTR)
- · Max paper size : LGL
- Print/copy/scan/FAX/Duplex printing/ADF
- Weight: approx.42kg(CRG not included)

## **Company Information**

Canon Inc.

30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo 146-8501, Japan +81-3-3758-2111

Registration#	JR-AI-24222E		
PCR number	PA-590000-AI-08		
PCR name	Imaging input and/or output equipment		
Publication date	7/12/2024		
Verification date	7/5/2024		
Verification method	System certificaion		
Verification#	JV-AI-24222		
<b>Expiration date</b>	7/4/2029		
PCR review was conducted by:			
Approval date	9/1/2023		
PCR review	Masayuki Kanzaki		
panel chair	Sustainable Management Promotion Organizat		
Third party varifi	ou*		

#### Third party verifier\*

Hiroyuki Uchida

Independent verification of data & declaration in accordance with ISO14025

xternal
e


Registration number: JR-AI-2422E

<sup>\*</sup>Auditor's name is stated if system certification has been performed.



#### Japan EPD Program by SuMPO

Sustainable Management Promotion Organization 14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan https://ecoleaf-label.jp/

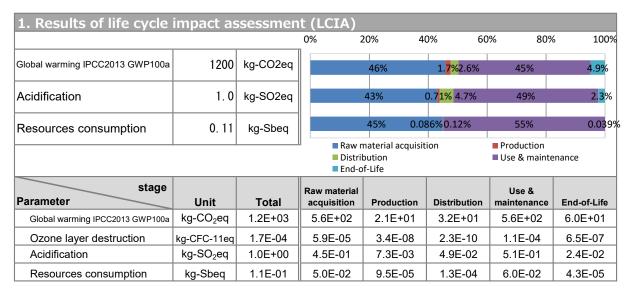

2. Life cycle inventory analysis (LCI)				
Parameter		Unit		
Non-renewable energy resources	1.9E+04	MJ		
Renewable primary energy	3.4E+02	MJ		

3. Material composition				
Material		Unit		
Common Steel	28	%		
Stainless Steel	0.49	%		
Aluminium	0.75	%		
Other Metal	3.0	%		
Plastic	29	%		
Rubber	0.31	%		
Glass	1.5	%		
Paper/Wood	27	%		
Circuit Board	4.9	%		
Others	4.2	%		

## 5. Additional explanation

Calculated in the following conditions;

- · Printing paper is not considered.
- Expected use period is 5 years.
- The standard scenario for Multifunction Device (EP type).
- · US market.
- Print volume: 537,600 sheets.
- The applied Energy Star program version is 3.0.
- We evaluated the Ecoleaf with Canon's own data of raw materials weight and the general basic unit for the parts because it is difficult to collect the data for a couple of thousands of parts. Accordingly, the results may be different from the specific product specification. As such, please be advised that this result would be a rough estimate.



# Japan EPD Program by SuMPO

Sustainable Management Promotion Organization 14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan https://ecoleaf-label.in/

# 6-1. Supplementary environmental information

Complies with the EU RoHS Directive (2011/65/EU) and its amendments including 2015/863/EU. Manufactured at ISO 14001 certified factories.

# 7. Assumptions of secondary data used

IDEA v2.1.3, and registered data v1.13 of Japan EPD Program by SuMPO are used.

## 8. Remarks

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied. (Reference URL : https://ecoleaf-label.jp/regulation/)

Registration number: JR-AI-2422E