



A3 Color Multifunction Printer  
Apeos C5571 (Model-PFS-2TS)

**FUJIFILM**  
Value from Innovation

富士フイルム ビジネス イノベーション株式会社  
FUJIFILM Business Innovation Corp.

Apeos, Apeos logo and ApeosPlus are registered trademarks or trademarks of FUJIFILM Business Innovation Corp. in Japan and/or other countries.

**Functional unit**

Per unit of product

**System boundary**

- final products     intermediate products

Raw material acquisition, Production, Distribution,  
Use & Maintenance, End-of-Life

**Main specifications of the product**

- Model: Apeos C5571 (Model-PFS-2TS)
- Color Multifunction Printer (EP Type)
- Print Speed (A4 LEF): Color 55ppm, Monochrome 55ppm
- Paper Size (Max.): A3, 11×17", 297×432 mm
- Copy / Print / FAX / Scan
- Automatic 2 Sided Output,  
Automatic Document Feeder

**Company Information**

**FUJIFILM Business Innovation Corp.**

6-1 Minatomirai, Nishi-ku, Yokohama-shi, Kanagawa Japan

<https://www.fujifilm.com/fbglobal/eng>

<b>Registration#</b>	JR-AI-24314E
<b>PCR number</b>	PA-590000-AI-08
<b>PCR name</b>	Imaging input and/or output equipment
<b>Publication date</b>	10/7/2024
<b>Verification date</b>	9/27/2024
<b>Verification method</b>	System certificaion
<b>Verification#</b>	2024-FB-EL-031
<b>Expiration date</b>	9/26/2029

**PCR review was conducted by:**

<b>Approval date</b>	9/1/2023
PCR review panel chair	Masayuki Kanzaki Sustainable Management Promotion Organization

**Third party verifier\***

Sachiko Hashizume


Independent verification of data & declaration in accordance with ISO14025

internal     external

\*Auditor's name is stated if system certification has been performed.



**1. Results of life cycle impact assessment (LCIA)**

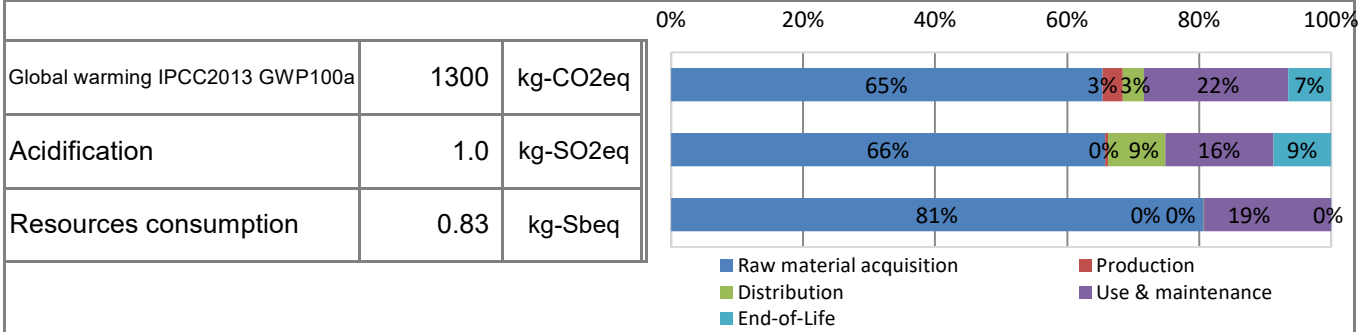

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO <sub>2</sub> eq	1.3E+03	8.8E+02	4.1E+01	4.3E+01	2.9E+02	8.8E+01
Acidification		kg-SO <sub>2</sub> eq	1.0E+00	6.6E-01	4.5E-03	8.7E-02	1.7E-01	8.8E-02
Resources consumption		kg-Sbeq	8.3E-01	6.7E-01	1.9E-04	1.9E-04	1.6E-01	1.5E-04

**2. Life cycle inventory analysis (LCI)**

Parameter	Unit	Value
Non-renewable material resources	kg	1.1E+02
Renewable material resources	kg	2.8E+02

**3. Material composition**

Material	Quantity	Unit
Steel	57	kg
SUS	0.75	kg
Aluminium	0.90	kg
Other Metals	8.8	kg
Plastic	38	kg
Rubber	0.11	kg
Glass	2.0	kg
Paper, Wood	7.7	kg
Circuit Board	4.5	kg
Conversion Parts	4.5	kg
Others	5.2	kg

**5. Additional explanation**

- Product destination: Japan
- Calculated based on standard scenario for MFP (EP type).
- Assumed lifespan of the product is five years.
- Printing paper is excluded from Use & maintenance stage.
- The applied International ENERGY STAR® Program Version is 3.0.
- Assumed print volume are 451,200 sheets.  
 $1/4 \times 32$  (jobs per day)  $\times$  47 (sheets per job)  $\times$  5 (days)  $\times$  4 (weeks)  $\times$  12 (months)  $\times$  5 (years) = 451,200 (sheets)



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24314E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization  
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan  
<https://ecoleaf-label.jp/>

#### 6-1. Supplementary environmental information

ENERGY STAR® Ver.3.0 qualified.

#### 7. Assumptions of secondary data used

Inventory Database: LCI Database IDEA v2.1.3, Japan EPD Program by SuMPO registered data v1.18.

#### 8. Remarks

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.  
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

Registration number : JR-AI-24314E