

CANON Inc.

Document Scanner imageFORMULA DR-S350NW



Functional unit

Per unit product

System boundary

- final products
 intermediate products

Raw Material acquisition, Production, Distribution, Use & maintenance, and End-of-Life stage

Main specifications of the product

Model name

imageFORMULA DR-S350NW

Specifications

- Sheet Fed Scanner
- Scanning Speed : 50ppm(Simplex)/100ipm(Duplex)
(Color, 200dpi, A4 vertical document size)
- Maximum Scan Paper size : A4
- Scanning Resolution : 600dpi
- Scanning sensor Unit : Contact image sensor
- Image Element : Complementary Metal-Oxide Semiconductor

Company Information

Canon Inc.

30-2, Shimomaruko 3-chome, Ohta-ku,

Tokyo 146-8501. Japan +81-3-3758-2111

Registration#	JR-AI-24395E
PCR number	PA-590000-AI-08
PCR name	imaging input and/or output equipment
Publication date	29-Oct-2024
Verification date	2-Oct-2024
Verification method	Product-by-product
Verification#	JV-AI-24395
Expiration date	1-Oct-2029
PCR review was conducted by:	
Approval date	1-Sep-2023
PCR review panel chair	Masayuki Kanzaki Sustainable Management Promotion Organization

Third party verifier*

Takahiro Ato


Independent verification of data & declaration in accordance with ISO14025

internal
 external

*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-24395E

1. Results of life cycle impact assessment (LCIA)

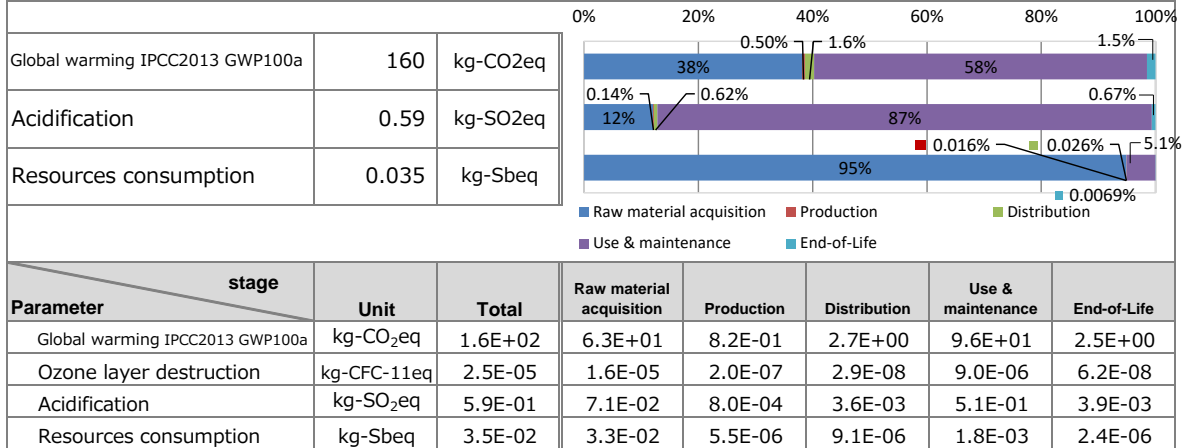

2. Life cycle inventory analysis (LCI)

Parameter	Unit
Non-renewable energy resources	2.8E+03 MJ
Non-renewable energy resources	8.3E+02 MJ

3. Material composition

Material	Unit
Common Steel	9.8 %
Stainless Steel	3.3 %
Aluminium	0.0038 %
Other Metal	4.7 %
Plastic	37 %
Rubber	1.2 %
Glass	0.30 %
Paper/Wood	29 %
Circuit Board	3.2 %
Others	12 %

*Data derived from LCA and not assigned to the impact categories of LCIA

5. Additional explanation

- Assumed destination of the product when calculated: Europe, North America, South America, Asia
- Calculation method for the use & maintenance stage
Estimated usage period: 5 years
Load on the image output media during use is not included.
- Scenario used for load calculation: sheetfed scanner
Category: Medium speed1
Calculation was made under the following situation based on the scenario.
A4 vertical feeding, 200dpi, 50ppm(Simplex) /100ipm(Duplex)

6-1. Supplementary environmental information

Complies with the EU RoHS Directive (2011/65/EU) and its amendments including 2015/863/EU.
Manufactured at ISO 14001 certified factories.

7. Assumptions of secondary data used

IDEA v3.1, and registered data v1.13 of Japan EPD Program by SuMPO are used.

8. Remarks

-

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.
(Reference URL : <https://ecoleaf-label.jp/regulation/>)