



SHARP

Sharp Corporation

DIGITAL MULTIFUNCTIONAL SYSTEM

BP-50M36 (EU)

Functional unit

Per unit of product

System boundary

final products intermediate products
Raw material acquisition, Production, Distribution,
Use & maintenance, End-of-Life

Main specifications of the product

Model name : BP-50M36
Marking technologies : Electrophotographic Printer (EP)
Print speed : Monochrome 36prints/minute (A4)
Maximum Paper Size : A3W
Print/Copy/Scan : Standard
Duplex printing/ADF : Standard

Company Information

SHARP CORPORATION
Smart Business Solutions BU
E-mail : ECOLEAF-BS@sharp.co.jp

Registration#	JR-AI-24404E
PCR number	PA-590000-AI-08
PCR name	Imaging input and/or output equipment
Publication date	31 October 2024
Verification date	23 October 2024
Verification method	System certificaion
Verification#	FV-08-24029
Expiration date	22 October 2029
PCR review was conducted by:	
Approval date	01 September 2023
PCR review panel chair	Masayuki Kanzaki Sustainable Management Promotion Organization

Third party verifier*


Shouko Hashizume

Independent verification of data & declaration in
accordance with ISO14025

internal external

*Auditor's name is stated if system certification has been performed.

1. Results of life cycle impact assessment (LCIA)

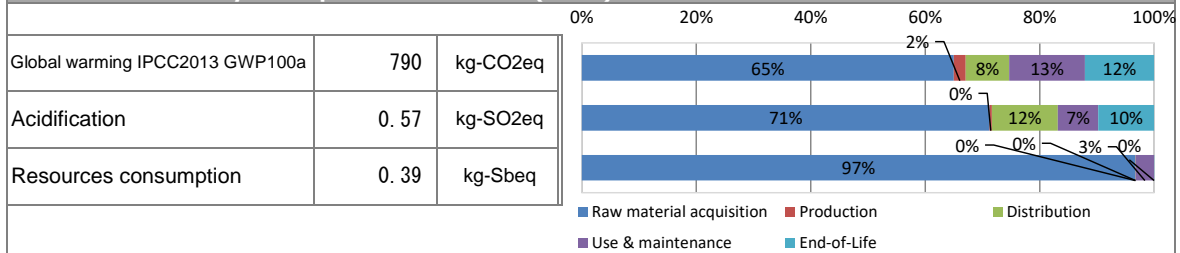

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO ₂ eq	7.9E+02	5.1E+02	1.6E+01	6.0E+01	1.0E+02	9.5E+01
Acidification		kg-SO ₂ eq	5.7E-01	4.0E-01	2.3E-03	6.5E-02	4.0E-02	5.5E-02
Resources consumption		kg-Sbeq	3.9E-01	3.8E-01	3.1E-05	2.5E-04	1.3E-02	9.0E-05

2. Life cycle inventory analysis (LCI)

Parameter	Unit
Non-renewable material resources	4.4E+01 kg
Renewable material resources	9.5E+01 kg

3. Material composition

Material	Unit
Steel	2.5E+01 kg
SUS	1.3E+00 kg
Aluminium	1.4E-01 kg
Other metal	1.8E-01 kg
Plastic	3.0E+01 kg
Rubber	7.3E-02 kg
Glass	1.7E+00 kg
Paper · Wood	1.3E+01 kg
Circuit Board	2.2E+00 kg
Others	4.3E+00 kg

5. Additional explanation

- Product destination: Europe
 - Calculation method of use stage (scenario)
 - Expected usage period: five years
 - Estimated number of use : 192,000 sheets
 $32 \text{ (Jobs/Day)} \times 20 \text{ (Sheets/Job)} \div 4 \times 5 \text{ (Days/Week)} \times 4 \text{ (Weeks/Month)} \times 12 \text{ (Months/Year)} \times 5 \text{ (Years)}$
 = 192,000 sheets
 - The impact of paper for printing is not included.
 - Products selected in the scenario used for inventory calculation : Multifunction device (EP)
- ※ Calculated according to the ENERGY STAR® Ver.3.0 program.

6-1. Supplementary environmental information

- Assembly and production of this product, as well as production of the photoconductor and toner, which are the main components, are performed at ISO 14001-certified factories.

7. Assumptions of secondary data used

IDEA v2.1.3 and Japan EPD Program by SuMPO Registry data v1.18

8. Remarks

-

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.
(Reference URL : <https://ecoleaf-label.jp/regulation/>)