



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24432E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan
<https://ecoleaf-label.jp/>



Remanufactured Product
A3 Color Multifunction Printer

ApeosPort-VII C2273 R

FUJIFILM

Value from Innovation

富士フイルム ビジネス イノベーション株式会社
FUJIFILM Business Innovation Corp.

The image above shows "ApeosPort-VII C3373" and the actual product is labeled "ApeosPort-VII C2273."

Apeos, Apeos logo and ApeosPlus are registered trademarks or trademarks of FUJIFILM Business Innovation Corp. in Japan and/or other countries.

Functional unit

Per unit of product

System boundary

- final products intermediate products

Raw material acquisition, Production, Distribution,
Use & Maintenance, End-of-Life

Main specifications of the product

- Model: ApeosPort-VII C2273 R
- Color Multifunction Printer (EP Type)
- Print Speed (A4 LEF): Color 25ppm, Monochrome 25ppm
- Paper Size (Max.): SRA3(320×450 mm)、
12×18"(305×457 mm)、A3
- Copy / Print / Scan / Fax
- Automatic 2 Sided Output, Automatic Document Feeder

Company Information

FUJIFILM Business Innovation Corp.

6-1 Minatomirai, Nishi-ku, Yokohama-shi, Kanagawa Japan

<https://www.fujifilm.com/fbglobal/eng>

Registration#	JR-AI-24432E
PCR number	PA-590000-AI-08
PCR name	Imaging input and/or output equipment
Publication date	12/13/2024
Verification date	12/4/2024
Verification method	System certificaion
Verification#	2024-FB-EL-040
Expiration date	12/3/2029
PCR review was conducted by:	
Approval date	9/1/2023
PCR review panel chair	Masayuki Kanzaki Sustainable Management Promotion Organization

Third party verifier*

Sachiko Hashizume

Independent verification of data & declaration in
accordance with ISO14025


- internal external

*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-24432E



1. Results of life cycle impact assessment (LCIA)

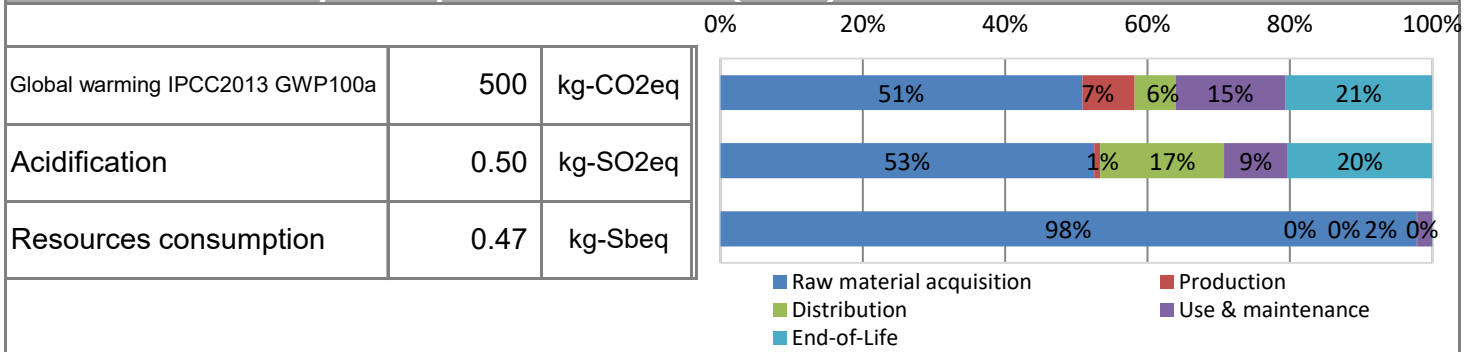

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO ₂ eq	5.0E+02	2.5E+02	3.7E+01	2.9E+01	7.7E+01	1.0E+02
Acidification		kg-SO ₂ eq	5.0E-01	2.6E-01	4.3E-03	8.7E-02	4.5E-02	1.0E-01
Resources consumption		kg-Sbeq	4.7E-01	4.6E-01	1.6E-04	1.3E-04	9.7E-03	1.7E-04

2. Life cycle inventory analysis (LCI)

Parameter	Unit	Value
Non-renewable material resources	kg	2.2E+01
Renewable material resources	kg	1.3E+02

3. Material composition

Material	Value	Unit
Steel	62	kg
SUS	2.2	kg
Aluminium	1.1	kg
Other Metals	7.8	kg
Plastic	45	kg
Rubber	0.071	kg
Glass	2.0	kg
Paper, Wood	7.7	kg
Circuit Board	4.2	kg
Conversion Parts	7.0	kg
Others	3.8	kg

5. Additional explanation

- Product destination: Japan
- Calculated based on standard scenario for MFP (EP type).
- Printing paper is excluded from Use & maintenance stage.
- The applied International ENERGY STAR® Program Version is 3.0.
- Assumed print volume are 90,000 sheets.
1/4 x 25 (jobs per day) x 12 (sheets per job) x 5 (days) x 4 (weeks) x 12 (months) x 5 (years) = 90,000 (sheets)



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24432E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan
<https://ecoleaf-label.jp/>

6-1. Supplementary environmental information

ENERGY STAR® Ver.3.0 qualified.

7. Assumptions of secondary data used

Inventory Database: LCI Database IDEA v2.1.3, Japan EPD Program by SuMPO registered data v1.18.

8. Remarks

This product has reused parts collected from used products to reduce the environmental impacts. It is reflected as a reduction at the raw material acquisition stage in the life cycle assessment result.

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

Registration number : JR-AI-24432E