



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24437E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization

14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>



Remanufactured Product
A3 Color Multifunction Printer
ApeosPort-VII C5573 R (for AU)

FUJIFILM
Value from Innovation

富士フイルム ビジネス イノベーション株式会社
FUJIFILM Business Innovation Corp.

Apeos, Apeos logo and ApeosPlus are registered trademarks or trademarks of FUJIFILM Business Innovation Corp. in Japan and/or other countries.

Functional unit

Per unit of product

System boundary

- final products intermediate products

Raw material acquisition, Production, Distribution,
Use & Maintenance, End-of-Life

Main specifications of the product

- Model: ApeosPort-VII C5573 R
- Color Multifunction Printer (EP Type)
- Print Speed (A4 LEF): Color 55ppm, Monochrome 55ppm
- Paper Size (Max.): SRA3(320x450mm),
12×18"(305×457 mm), A3
- Copy / Print / Scan / Fax
- Automatic 2 Sided Output,
Automatic Document Feeder

Company Information

FUJIFILM Business Innovation Corp.

6-1 Minatomirai, Nishi-ku, Yokohama-shi, Kanagawa Japan

<https://www.fujifilm.com/fbglobal/eng>

Registration#	JR-AI-24437E
PCR number	PA-590000-AI-08
PCR name	Imaging input and/or output equipment
Publication date	11/14/2024
Verification date	12/13/2024
Verification method	System certificaion
Verification#	2024-FB-EL-035
Expiration date	12/12/2029
PCR review was conducted by:	
Approval date	9/1/2023
PCR review panel chair	Masayuki Kanzaki Sustainable Management Promotion Organization

Third party verifier*

Sachiko Hashizume

Independent verification of data & declaration in accordance
with ISO14025


internal external

*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-24437E



1. Results of life cycle impact assessment (LCIA)

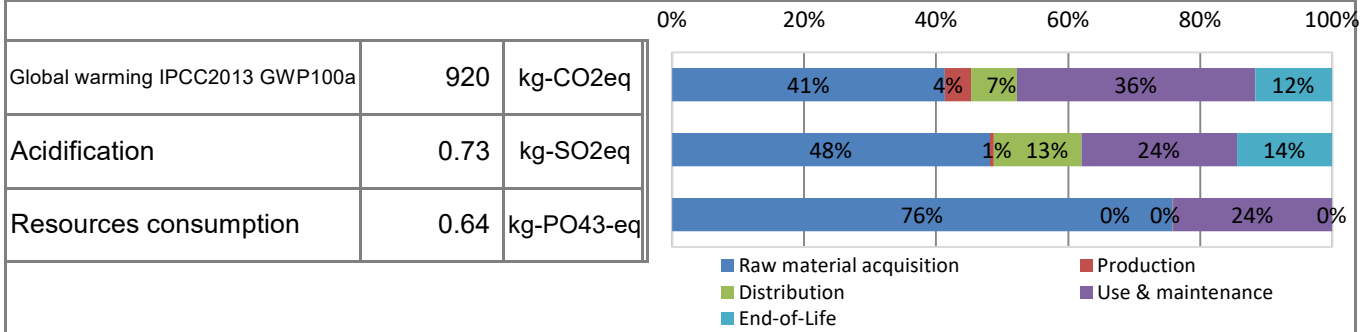

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO ₂ eq	9.2E+02	3.8E+02	3.6E+01	6.4E+01	3.3E+02	1.1E+02
Acidification		kg-SO ₂ eq	7.3E-01	3.5E-01	4.3E-03	9.6E-02	1.7E-01	1.0E-01
Resources consumption		kg-PO ₄ ³⁻ eq	6.4E-01	4.9E-01	1.6E-04	2.7E-04	1.6E-01	1.7E-04

2. Life cycle inventory analysis (LCI)

Parameter	Value	Unit
Non-renewable material resources	3.1E+01	kg
Renewable material resources	2.2E+02	kg

3. Material composition

Material	Value	Unit
Steel	61	kg
SUS	0.94	kg
Aluminium	1.0	kg
Other Metals	7.5	kg
Plastic	48	kg
Rubber	0.13	kg
Glass	1.9	kg
Paper, Wood	8.4	kg
Circuit Board	4.3	kg
Conversion Parts	6.3	kg
Others	3.9	kg

5. Additional explanation

- Product destination: Australia
- Calculated based on standard scenario for MFP (EP type).
- Assumed lifespan of the product is five years.
- Printing paper is excluded from Use & maintenance stage.
- The applied International ENERGY STAR® Program Version is 3.0.
- Assumed print volume are 451,200 sheets.
1/4 x 32 (jobs per day) x 47 (sheets per job) x 5 (days) x 4 (weeks) x 12 (months) x 5 (years) = 451,200 (sheets)



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24437E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan
<https://ecoleaf-label.jp/>

6-1. Supplementary environmental information

7. Assumptions of secondary data used

Inventory Database: LCI Database IDEA v2.1.3, Japan EPD Program by SuMPO registered data v1.18.

8. Remarks

This product has reused parts collected from used products to reduce the environmental impacts.
It is reflected as a reduction at the raw material acquisition stage in the life cycle assesment result.

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

Registration number : JR-AI-24437E