



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-20112E-A

Ecoleaf Environmental Labeling Program

Sustainable Management Promotion Organization

2-1, Kaji-cho 2 chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>

KONICAMINOLTA ,INC.

AccurioPrint C4065



Photo:Option-unit is mounted

Functional unit

Per unit of product
(Option-unit is excluded)

System boundary

- final products intermediate products

Raw material acquisition, Production, Distribution,
Use & maintenance, End-of-Life

Main specifications of the product

Model name : AccurioPrint C4065

- Marking technologies : Electrophotographic Printer (EP)
- Printing speed(8.5"×11") : Monochrome 80 prints-per-minute / Color 65 prints-per-minute
- Printing paper : Maximum 11"×17"
- Duplex function : Standard

Company Information

Please direct any inquiries or comments
to e-mail: eco-support@konicaminolta.com

Registration#	JR-AI-20112E-A
PCR number	PA-590000-AI-03
PCR name	Imaging input and/or output equipment
Publication date	01/15/2021
Verification date	07/02/2021
Verification method	System certification
Verification#	JV-AI-20112-A
Expiration date	07/01/2026
PCR review was conducted by:	
Approval date	11/8/2019
PCR review panel chair	Masayuki Kanzaki (Sustainable Management Promotion Organization)

Third party verifier*

Kazuo Naitou

Independent verification of data & declaration in accordance
with ISO14025


internal external

*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-20112E-A



1. Results of life cycle impact assessment (LCIA)

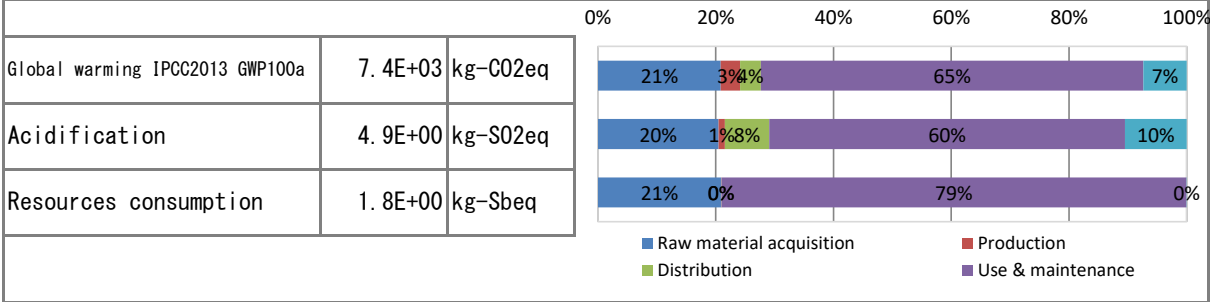

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO ₂ eq	7.4E+03	1.5E+03	2.4E+02	2.6E+02	4.8E+03	5.5E+02
Acidification		kg-SO ₂ eq	4.9E+00	1.0E+00	5.3E-02	3.7E-01	3.0E+00	5.2E-01
Resources consumption		kg-Sbeq	1.8E+00	3.7E-01	6.9E-04	1.1E-03	1.4E+00	1.3E-03

2. Life cycle inventory analysis (LCI)

Parameter	Value	Unit
Non-renewable material resources	4.2E+02	kg
Renewable material resources	7.9E+02	kg

3. Material composition

Material	Value	Unit
Steel	2.2E+02	kg
SUS	1.1E+01	kg
Al	9.4E+00	kg
Other metals	5.0E+00	kg
Glass	1.5E+00	kg
Thermoplastics resin	4.0E+01	kg
Wood	1.7E+01	kg
Paper	2.3E+01	kg
Rubber	2.7E+00	kg
Assembled circuit board	4.6E+00	kg
Medium-sized motor	1.5E+01	kg

5. Additional explanation

- Production destination : North America
- Calculation method of use stage (Calculated by the standard scenario for MFP (EP type))
 - Expected usage period : five years
 - Estimated number of sheets used : 3,840,000
 - The impact of printing paper is not included.
 - The impact of expendables and Maintenance parts are included in the stage of Use&maintenance.

※ Conformed to the International ENERGY STAR® Ver2.0 Program



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-20112E-A

Ecoleaf Environmental Labeling Program

Sustainable Management Promotion Organization

2-1, Kaji-cho 2 chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>

6-1. Supplementary environmental information

- ENERGY STAR® Ver.3.0 qualified

7. Assumptions of secondary data used

IDEA v2.1.3 and Ecoleaf Environmental Labeling Program Registry data v1.06

8. Remarks

Revise day:07/09/2021 Revised the calculation / description method and re-verified.

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

Registration number : JR-AI-20112E-A