

# Hitachi, Ltd. Hitachi Virtual Storage Platform One Block 26



## Functional unit

Per sales unit (per unit)

## System boundary

final products       intermediate products

## Main specifications of the product

All-Flash Array

- Controller chassis

Cache capacity : 768 GiB

HT-40SP-MNDNNA Up to 1 unit

Up to 60TB 24 NVMe SSD

- Drive box

HT-F40SP-DBN2E Up to 2 units

Up to 60TB 24 NVMe SSD

## Company Information

Hitachi, Ltd.

+81-3-5471-2745

Registration#	JR-BF-24012E
PCR number	PA-520000-BF-04
PCR name	IT equipments
Publication date	12 Mar. 2025
Verification date	1st Mar. 2025
Verification method	Product-by-product
Verification#	JV-BF-24012
Expiration date	28 Feb. 2030
<b>PCR review was conducted by:</b>	
Approval date	8/15/2023
PCR review panel chair	Ken Yamagishi (Sustainable Management Promotion Organization)

## Third party verifier\*


Yuki Sakamoto

Independent verification of data & declaration in accordance with ISO14025

internal       external

\*Auditor's name is stated if system certification has been performed.

### 1. Results of life cycle impact assessment (LCIA)

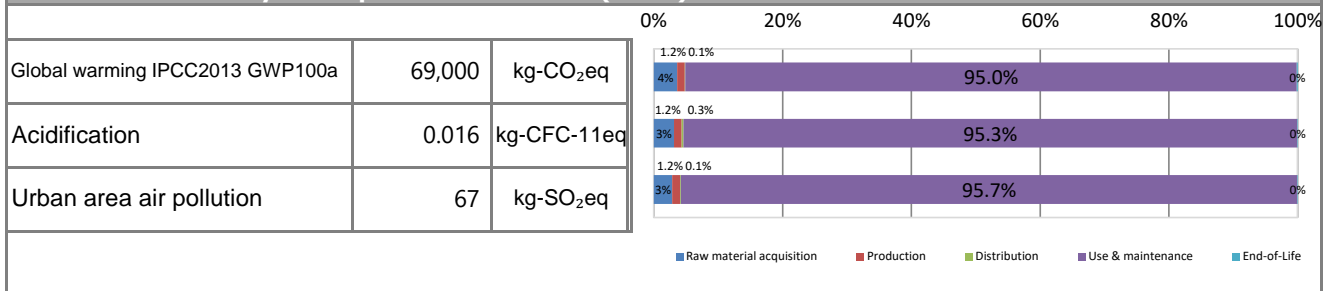

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO <sub>2</sub> eq	6.9E+04	2.5E+03	8.2E+02	5.4E+01	6.5E+04	9.4E+01
Ozone layer destruction		kg-CFC-11eq	1.6E-02	1.7E-04	2.0E-04	7.2E-10	1.6E-02	2.8E-06
Acidification		kg-SO <sub>2</sub> eq	6.7E+01	2.1E+00	8.1E-01	1.8E-01	6.4E+01	5.3E-02
Urban area air pollution		kg-SO <sub>2</sub> eq	5.1E+01	1.5E+00	6.1E-01	6.7E-02	4.9E+01	3.2E-02
Photochemical ozone		kg-C <sub>2</sub> H <sub>4</sub> eq	1.3E+00	3.8E-02	1.6E-02	3.8E-04	1.3E+00	3.5E-04
Toxic chemicals(cancer)		kg-C <sub>6</sub> H <sub>6</sub> eq	4.4E+00	2.8E+00	1.9E-02	2.7E-04	1.5E+00	5.9E-03
Toxic chemicals(chronic disease)		kg-C <sub>6</sub> H <sub>6</sub> eq	2.2E-01	1.9E-02	2.4E-03	1.7E-04	1.9E-01	9.9E-05
Aquatic toxicity		kg-C <sub>6</sub> H <sub>6</sub> eq	1.4E+02	8.5E+00	1.6E+00	8.6E-06	1.3E+02	2.4E-02
Biological toxicity		kg-C <sub>6</sub> H <sub>6</sub> eq	3.3E+03	1.9E+02	3.9E+01	1.4E-04	3.1E+03	5.4E-01
Eutrophication		kg-PO <sub>4</sub> <sup>3-</sup> eq	1.7E-02	1.3E-02	5.0E-05	5.5E-10	4.0E-03	3.4E-04
Land use(Occupation)		m <sup>2</sup> /year	3.9E+02	5.3E+01	4.1E+00	4.5E+00	3.2E+02	5.3E-01
Land use(Transformation)		m <sup>2</sup>	9.5E+00	3.4E-01	1.1E-01	9.0E-02	9.0E+00	1.1E-02
Resources consumption		kg-Sbeq	7.4E-01	2.9E-01	5.6E-03	2.2E-04	4.4E-01	1.6E-04

### 2. Life cycle inventory analysis (LCI)

Parameter	Value	Unit
Non-renewable material resources	1.3E+03	kg
Non-renewable energy resources	2.6E+04	kg
Non-renewable energy resources	1.1E+06	MJ
Renewable material resources	3.6E+02	kg
Renewable primary energy	4.3E+05	MJ
Consumption of freshwater	4.8E+01	m <sup>3</sup>

### 3. Material composition

Material	Value	Unit
All Flash array Steel	79	%
Other metals	2	%
Plastics	1	%
PCB	4	%
Copper-clad wire, Motors	4	%
Batteries	1	%
PSU	4	%
SSD	5	%
Total	100	%

### 4. Waste to disposal

Parameter	Value	Unit
Hazardous waste	0.00E+00	kg
Non-hazardous waste.	4.50E+02	kg
Treated MSW for landfill	9.99E-08	kg
Treated industrial waste for landfill	4.50E+02	kg

\*Data derived from LCA and not assigned to the impact categories of LCIA



## 5. Additional explanation

### <Products>

- Product Name : Hitachi Virtual Storage Platform One Block 26
  - Conditions for calculating CO<sub>2</sub>eq emissions :
    - Calculated using 1 controller chassis (HT-40SP-MNDNNA) with 24 NVMe SSDs installed.
    - and 2 drive boxes (HT-F40SP-DBN2E) with the maximum installed of 48 NVMe SSDs
  - Product type name of the scenario used :
    - Disk array (Solid State Drive(SSD) installed)
- <Product main specifications>
- Storage capacity\*1 : 4,320TB
  - Operating years\*2 : 5 years
  - Drive type : Solid State Drive (NVMe SSD)
  - Drive interfaces : NVMe
  - Installed drives : 72 units
- Measurement conditions :
    - Power during use is measured by the measurement method specified by certified PCR(PA-520000-BF-04)

\*1 The capacity is calculated as 1TB = 1,000,000,000,000 bytes

\*2 The operating years were assumed to be the statutory useful life(5 years for computer/others)



### 6-1. Supplementary environmental information

• Greenhouse gas emissions at the use and maintenance stages are the largest, accounting for about 95% of the entire life cycle, and the influence of power consumption during use is large, so it can be said that energy-saving performance during use is a very important factor.

Please note that the usage and maintenance stage may not be the same as the customer's terms of use because general conditions have been set and evaluated.

• In calculating EPD, we use our data for the amount of raw materials used, but since it is difficult to collect data at the time of manufacturing thousands of parts, we use general data at the time of manufacturing raw materials.

Therefore, it may not reflect the unique characteristics of this product.

. Manufactured and assembled at a factory that has obtained ISO14001:2015 certification.

. Obtained USA EPA EnergyStar certification.

. Compliant with the European RoHS Directive.

. We have established environmentally friendly green procurement guidelines and are working on green procurement with our procurement partners.

### 7. Assumptions of secondary data used

Priority to IDEA ver. 3.1.0, it was supplemented with the registered basic unit v1.15.

### 8. Remarks

-

- For data quantification, please refer to PCR and Rules on quantification and declaration.

- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.  
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

- This is a self-declared translation of EPD that can be accessed at [[検証済みEPDへのリンクを追加してください](#)]  
and is published for convenience purposes. Only the original EPD is valid and binding between parties.