

RICOH COMPANY,LTD

Color Printer (Electrophotography)



# Pro C9500 (for EU)



### Functional unit

Per product

### System boundary

final products
  intermediate products

Raw material acquisition, Production, Distribution, Use & maintenance, End-of-Life

### Main specifications of the product

Product name: Pro C9500

Product destination: EU

Main specifications:

Color Printer (Electrophotography)

Print Speed : 115 prints/minute (A4)

Maximum Paper Size : 13" x 19.2"

Included Units in Assessment : Automatic Reversing Document Feeder

### Company Information

RICOH COMPANY,LTD

Tel:(03) 3777-8111

Registration#	JR-AI-24389E
PCR number	PA-590000-AI-08
PCR name	Imaging input and/or output equipment
Publication date	3/31/2025
Verification date	3/21/2025
Verification method	System certificaion
Verification#	JV-AI-24389
Expiration date	3/20/2030
<b>PCR review was conducted by:</b>	
Approval date	9/1/2023
PCR review panel chair	Masayuki Kanzaki (SuMPO)

### Third party verifier\*


Hiroyuki Uchida

Independent verification of data & declaration in accordance with ISO14025

internal
  external

\*Auditor's name is stated if system certification has been performed.

### 1. Results of life cycle impact assessment (LCIA)

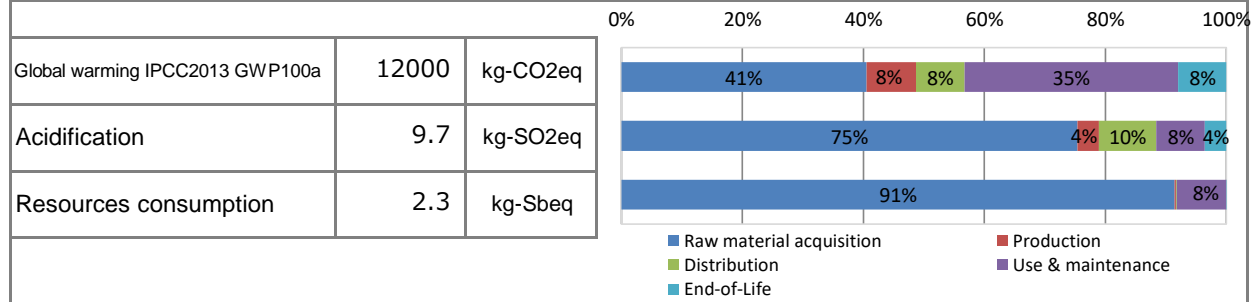

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a	kg-CO <sub>2</sub> eq	1.2E+04	4.7E+03	9.5E+02	9.3E+02	4.1E+03	9.2E+02	
Acidification	kg-SO <sub>2</sub> eq	9.7E+00	7.3E+00	3.4E-01	9.2E-01	7.8E-01	3.4E-01	
Resources consumption	kg-Sbeq	2.3E+00	2.1E+00	4.2E-03	4.0E-03	1.9E-01	5.6E-04	

### 2. Life cycle inventory analysis (LCI)

Parameter	Unit
Non-renewable material resources	1.3E+03 kg
Renewable material resources	8.7E+02 kg

### 3. Material composition

Material	Unit
SUS	6.1E+01 kg
Aluminum	5.4E+01 kg
Ordinary steel	8.0E+02 kg
Other metals	3.1E+01 kg
Thermoplastic resin	1.1E+02 kg
Thermosetting resin	7.0E+00 kg
Glass	4.3E+00 kg
Rubber	4.7E+00 kg
Paper	7.2E+01 kg
Lubricant	4.4E-01 kg
Mounting circuit board	1.8E+00 kg
Wood	1.6E-01 kg

\*Data derived from LCA and not assigned to the impact categories of LCIA

## 5. Additional explanation

Products selected in the scenario used for load calculation

--Printer (EP)

- Product destination: EU
- Expected usage period: 5 years
- Estimated number of sheets: 1,977,600 sheets ※

※Apply the number of sheets according to the actual usage conditions based on the product performance

※Compatible with International Energy Star Program Ver.3.0

-The load on the image output medium (printing paper) is not included.

## 6-1. Supplementary environmental information

Compliant with the International Energy Star Program Ver.3.0. It also complies with the European RoHS Directive. Assembly production of this product and production of the main parts, photoconductor and toner, are carried out at an ISO14001 certified factory.

Certification number: JQA – E-70001

<https://jp.ricoh.com/sustainability/environment/management/iso>

## 7. Assumptions of secondary data used

IDEA v2.1.3, and registered data of Japan EPD Program by SuMPO v1.13 are used.

## 8. Remarks

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.  
(Reference URL : <https://ecoleaf-label.jp/regulation/>)