



SuMPO EPD

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24652E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan
<https://ecoleaf-label.jp/>



EPSON

High-speed Linehead
Inkjet Multifunction Printer

WF-M21000 (North America)

Seiko Epson Corporation

Functional unit

Per product

System boundary

- final products intermediate products

Raw material acquisition, Production, Distribution,
Use & maintenance, End-of-Life

Main specifications of the product

Model name: WF-M21000

Main Specifications

- Multifunction device (High-Performance Inkjet)
- Monochrome
- Print speed: 100ppm (single-sided A4 sheets)
- Maximum paper size (standard cassette): A3
- Automatic duplex printing

※This product is destined for North America

Company Information

Seiko Epson Corporation

<http://www.epson.com/>

<http://www.epson.jp/contact/> (Japanese)

3-3-5 Owa, Suwa-shi, Nagano-ken, Japan

TEL 81-266-52-5353 (Japan)

Registration#	JR-AI-24652E
PCR number	PA-590000-AI-08
PCR name	Imaging input and/or output equipment
Publication date	3/31/2025
Verification date	3/19/2025
Verification method	Product-by-product
Verification#	JV-AI-24652
Expiration date	3/18/2030
PCR review was conducted by:	
Approval date	9/1/2023
PCR review panel chair	Masayuki Kanzaki (SuMPO)

Third party verifier*

Tomoko Fuchigami

Independent verification of data & declaration in accordance
with ISO14025


internal

external

*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-24652E

1. Results of life cycle impact assessment (LCIA)

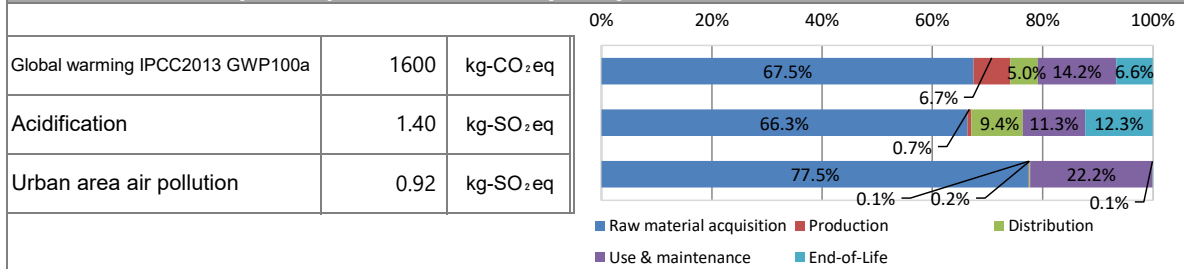

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO ₂ eq	1.6E+03	1.1E+03	1.1E+02	8.0E+01	2.3E+02	1.1E+02
Acidification		kg-SO ₂ eq	1.4E+00	9.6E-01	1.1E-02	1.4E-01	1.6E-01	1.8E-01
Resources consumption		kg-Sbeq	2.2E-01	1.7E-01	2.8E-04	3.4E-04	4.8E-02	1.1E-04

2. Life cycle inventory analysis (LCI)

Parameter	Value	Unit
Non-renewable material resources	1.7E+02	kg
Renewable material resources	3.1E+02	kg

3. Waste to disposal

Parameter	Value	Unit
Steel	1.0E+02	kg
SUS	3.4E+00	kg
Aluminum	3.3E+00	kg
Other metal	1.2E+01	kg
Plastic	5.4E+01	kg
Rubber	1.0E+00	kg
Glass	1.4E+00	kg
Paper and wood	2.2E+01	kg
Circuit Board	3.7E+00	kg
Other	1.2E+01	kg

5. Additional explanation

- Product destination: North America
- Calculation method of use stage (scenario)
 - Expected usage period: 5 years
 - Estimated number of use: 1,497,600 sheets*
 - Print measuring method (pattern): ISO/IEC 19752
 - Inventory of the print paper is not included
- Products selected in the scenario used for inventory calculation
 - Multifunction device (Inkjet)

* In accordance with the ENERGY STAR® Ver.3.1
 1,497,600 sheets = (156 pages x 32 jobs/day x 5 days) / 4 x 4 weeks x 12 months x 5 years

6-1. Supplementary environmental information

- This product and main components are produced in our ISO 14001 certified factories.
- Compliant with the International Energy Star Program Ver.3.1.
- It also complies with the European RoHS Directive.

7. Assumptions of secondary data used

We used IDEA v2.1.3 and SuMPO Environmental Label Program registration intensity v1.18.

8. Remarks

-

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.
 (Reference URL : <https://ecoleaf-label.jp/regulation/>)