

RICOH COMPANY,LTD

RICOH
imagine. change.

Color MFP (Electrophotography)

RICOH IM C6000F CE



Functional unit

Per product

System boundary

■ final products □ intermediate products

Raw material acquisition, Production, Distribution,
Use & maintenance, End-of-Life

Main specifications of the product

Product name: RICOH IM C6000F CE

Product destination: JPN

Main specifications:

Color MFP (Electrophotography)

Print Speed : 60 prints/minute (A4)

Maximum Paper Size : A3

Included Units in Assessment : Automati

Document Feeder, Automatic Duplexing Unit

Company Information

RICOH COMPANY,LTD

Tel: (03) 3777-8111

Registration#

JR-AI-24487E

PCR number

PA-590000-AI-08

PCR name

Imaging input and/or output equipment

Publication date

7/15/2025

Verification date

3/4/2025

Verification method

System certificaion

Verification#

JV-AI-24487

Expiration date

12/5/2029

PCR review was conducted by:

Approval date

9/1/2023

PCR review

Masayuki Kanzaki

panel chair

(SuMPO)

Third party verifier*

Hiroyuki Uchida


Independent verification of data & declaration in
accordance with ISO14025

☐ internal

☒ external

*Auditor's name is stated if system certification has been performed.

1. Results of life cycle impact assessment (LCIA)

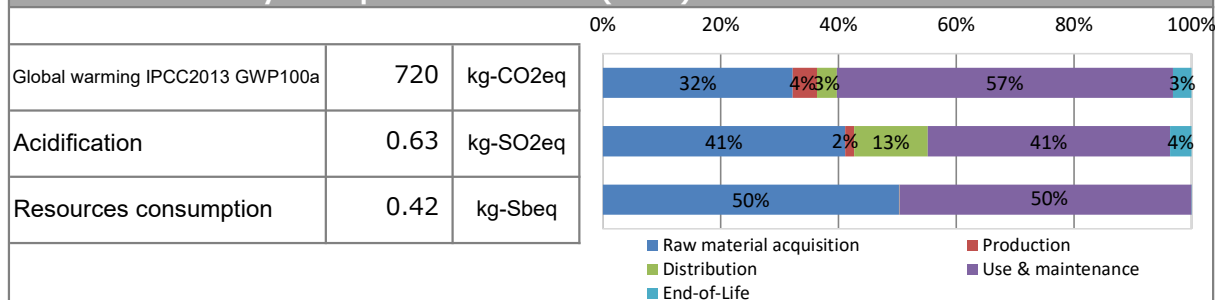

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO ₂ eq	7.2E+02	2.3E+02	3.0E+01	2.4E+01	4.1E+02	2.3E+01
Acidification		kg-SO ₂ eq	6.3E-01	2.6E-01	9.6E-03	7.9E-02	2.6E-01	2.3E-02
Resources consumption		kg-Sbeq	4.2E-01	2.1E-01	1.4E-04	9.9E-05	2.1E-01	5.2E-05

2. Life cycle inventory analysis (LCI)

Parameter	Unit	Value
Non-renewable material resources	kg	2.6E+01
Renewable material resources	kg	1.0E+02

3. Material composition

Material	Unit	Value
SUS	kg	2.2E+00
Aluminum	kg	1.3E+00
Ordinary steel	kg	6.5E+01
Other metals	kg	4.2E+00
Thermoplastic resin	kg	4.6E+01
Thermosetting resin	kg	1.2E+00
Glass	kg	2.3E+00
Rubber	kg	1.9E-01
Paper	kg	1.9E+01
Lubricant	kg	1.0E-02
Mounting circuit board	kg	2.5E+00
Wood	kg	4.8E-04
Silica gel	kg	2.7E+00



SuMPO EPD

Registration number : JR-AI-24487E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization

14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>

Type III Environmental Declaration (EPD)

*Data derived from LCA and not assigned to the impact categories of LCIA

5. Additional explanation

Products selected in the scenario used for load calculation

--MFP (EP)

- Product destination: JPN
- Expected usage period: 5 years
- Estimated number of sheets: 537600 sheets ※

※Apply the number of sheets according to the actual usage conditions based on the product performance

※Compatible with International Energy Star Program Ver.3.0

-The load on the image output medium (printing paper) is not included.

-This product uses reused parts to reduce the environmental impact. It is not included at the raw material acquisition stage in the LCA

6-1. Supplementary environmental information

Compliant with the International Energy Star Program Ver.3.0. It also complies with the European RoHS Directive.

Assembly production of this product and production of the main parts, photoconductor and toner, are carried out at an ISO14001 certified factory.

Certification number: JQA-E-70001

<https://jp.ricoh.com/sustainability/environment/management/iso>

7. Assumptions of secondary data used

IDEA v2.1.3, and registered data of Japan EPD Program by SuMPO v1.13 are used.

8. Remarks

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

Registration number : JR-AI-24487E