



SHARP

Sharp Corporation

DIGITAL FULL COLOR MULTIFUNCTIONAL SYSTEM

BP-71C31 (US)

EXIT TRAY CABINET is optional,
its impact is not included.

Functional unit

Per unit of product

System boundary

☒ final products ☐ intermediate products
Raw material acquisition, Production, Distribution,
Use & maintenance, End-of-Life

Main specifications of the product

Model name : BP-71C31

Marking technologies : Electrophotographic Printer (EP)

Print speed : Monochrome 31prints/minute (A4)

Full-color 31prints/minute (A4)

Maximum Paper Size : SRA3

Print/Copy/Scan : Standard

Duplex printing/ADF : Standard

Company Information

SHARP CORPORATION

Smart Business Solutions BU

E-mail : ECOLEAF-BS@sharp.co.jp

Registration#	JR-AI-25239E
PCR number	PA-590000-AI-08
PCR name	Imaging input and/or output equipment
Publication date	09 October 2025
Verification date	22 September 2025
Verification method	System certification
Verification#	FV-08-25025
Expiration date	21 September 2030
PCR review was conducted by:	
Approval date	01 September 2023
PCR review	Masayuki Kanzaki
panel chair	Sustainable Management Promotion Organization

Third party verifier*

Shouko Hashizume


Independent verification of data & declaration in
accordance with ISO14025

☐ internal ☒ external

*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-25239E

1. Results of life cycle impact assessment (LCIA)

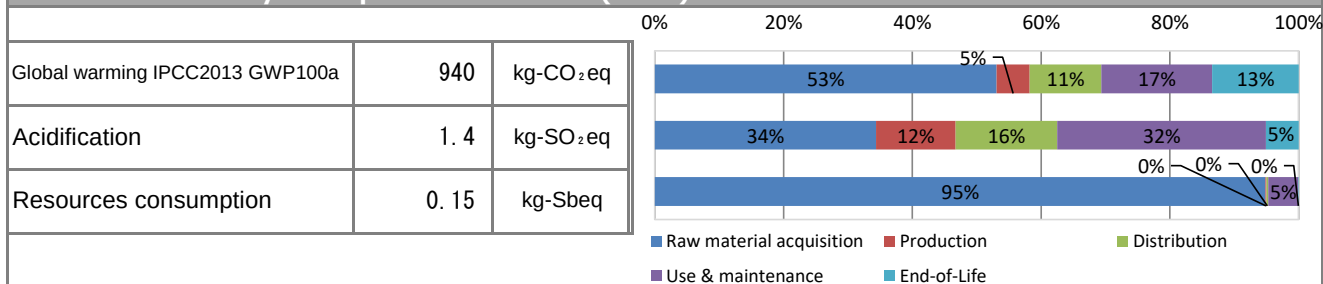

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO ₂ eq	9.4E+02	5.0E+02	4.8E+01	1.0E+02	1.6E+02	1.3E+02
Acidification		kg-SO ₂ eq	1.4E+00	4.7E-01	1.7E-01	2.2E-01	4.5E-01	7.0E-02
Resources consumption		kg-Sbeq	1.5E-01	1.4E-01	2.0E-04	4.4E-04	7.0E-03	1.5E-04

2. Life cycle inventory analysis (LCI)

Parameter	Unit
Non-renewable material resources	8.2E+01 kg
Renewable material resources	1.3E+02 kg

3. Material composition

Material	Unit
Steel	3.9E+01 kg
SUS	1.1E+00 kg
Aluminium	5.5E-01 kg
Other metal	9.5E-01 kg
Plastic	3.3E+01 kg
Rubber	1.2E-01 kg
Glass	2.2E+00 kg
Paper · Wood	1.4E+01 kg
Circuit Board	2.0E+00 kg
Others	6.4E+00 kg

5. Additional explanation

- Product destination: North America
 - Calculation method of use stage (scenario)
 - Expected usage period: five years
 - Estimated number of use : 139,500 sheets
 $31 \text{ (Jobs/Day)} \times 15 \text{ (Sheets/Job)} \div 4 \times 5 \text{ (Days/Week)} \times 4 \text{ (Weeks/Month)} \times 12 \text{ (Months/Year)} \times 5 \text{ (Years)}$
 $= 139,500 \text{ sheets}$
 - The impact of paper for printing is not included.
 - Products selected in the scenario used for inventory calculation : Multifunction device (EP)
- ※ Calculated according to the ENERGY STAR® Ver.3.0 program.

6-1. Supplementary environmental information

- Assembly and production of this product, as well as production of the photoconductor and toner, which are the main components, are performed at ISO 14001-certified factories.

7. Assumptions of secondary data used

IDEA v3.1.0 and Japan EPD Program by SuMPO Registry data v1.15

8. Remarks

-

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.
(Reference URL : <https://ecoleaf-label.jp/regulation/>)
- This is a selfdeclared translation of EPD that can be accessed at <https://ecoleaf-label.jp/epd/2452> and is published for convenience purposes. Only the original EPD is valid and binding between parties.