




Third party verified
Environmental Product Declaration
In conformance with
ISO14025 | ISO14040 | ISO14044



FUJI SASH CO.,LTD.

Reborn Low-Carbon Aluminum Building Materials "ReSash Green"

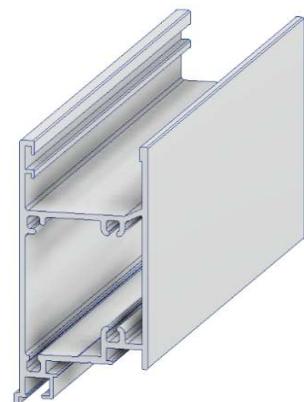

take various cross-sectional



Final product condition
(extruded profiles: frame only, excluding



the window portion of a building

Registration number	Verification date	Publication date	Expiration date	EPD type
SuMPO-EPD-2601-86-1	2026/1/19	2026/1/27	2031/1/18	Multiple Products EPD
<small>* First publication date</small>				
Additional standards in conformance		EPD can be updated or withdrawn during the validity period. To confirm the validity of this EPD, check the following website: https://ecoleaf-label.jp/epd/search		
ISO21930:2007				

● General Information

> Programme

Programme name	SuMPO EPD Japan
Programme operator	Sustainable Management Promotion Organization (SuMPO)
Address	KANDA SQUARE GATE 4F, 14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo, 101-0047, Japan
Website	https://ecoleaf-label.jp

> GPI and PCR

GPI	SuMPO EPD Japan General Program Instructions v.2.1.1		
PCR name	Windows		
PCR registration number	PA-212300-AD-05		
PCR publication date	2023/5/10		
PCR review panel chair	Masayuki Kanzaki (Sustainable Management Promotion Organization)		
PCR valid until	2028/5/10		

> Verification

Verification Type	Third-party verification in conformance with ISO14025 and ISO21930:2017		
	<input type="checkbox"/> Internal	<input checked="" type="checkbox"/> External	
	<input checked="" type="checkbox"/> Third-party verification by individual verifier	<input type="checkbox"/> Third-party verification by verification body	<input type="checkbox"/> Third-party verification by system certification
選択してください	Hiroyuki Nakamura (Herb International Professional Engineer Office)		

> Standards

Standards in conformance with:	<input checked="" type="checkbox"/> ISO14040:2006	<input checked="" type="checkbox"/> ISO14044:2006	<input checked="" type="checkbox"/> ISO14067:2018
	<input checked="" type="checkbox"/> ISO14025:2006	<input checked="" type="checkbox"/> ISO21930:2007	<input type="checkbox"/> ISO21930:2017
	<input type="checkbox"/> EN15804+A2	<input type="checkbox"/> EN50693:2019	<input type="checkbox"/> ISO/IEC63366:2025

EPD owner is responsible for the information contained in the EPD and for environmental claims related to the information. For any inquiries or requests regarding the content of the EPD, please contact the EPD owner.

EPDs are comparable only if they comply with the same standards, use the same sub-PCR where applicable, include all relevant information modules and are based on equivalent scenarios with respect to the context of construction works. Comparability of EPDs is limited to those applying a functional unit.

The LCIA results are relative expressions and do not predict impacts on category endpoints, the exceedance of thresholds, safety margins or risks.

When using weighted averages for calculation, the life cycle impact assessment results, life cycle inventory analysis-related information, waste-related information, and environmental information on output flows do not correspond to information about a specific product.

● EPD Owner's Information

Name of company and dept.	FUJI SASH CO.,LTD. Sustainability Promotion Office		
Address	4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan 11F, Tokyo Nissan Nishi-Gotanda Building		
Contact	mail: sustainability@fujisash.net tel: +81-3-6867-0755		
LCA practitioner	FUJI SASH CO.,LTD. Sustainability Promotion Office Tsuyoshi Akamatsu		
Company description	Under the management philosophy of "Fuji Sash expands dreams through windows," the company has established bases throughout Japan and primarily across Southeast Asia, and has built an integrated production system by leveraging collaboration within the group. Its main business activities include the manufacture, sale, and installation of curtain walls, building sashes, and other building materials.		

● Product Information

Product name		Reborn Low-Carbon Aluminum Building Materials "ReSash Green"	
Product /model number		aluminum extrusion (intermediate product)	
Product specification	Function	Extruded profiles forming the frame portions of aluminum building products, including windows and sashes.	
	Mass	Unit mass: 1 kg	Conversion factor -
	Applications	It is used as a primary raw material in the processing and assembly of windows, sashes, and curtain walls for buildings and residential housing.	
	TS*	Relevant JIS standards for aluminum and its alloys, the Building Standards Act, and related laws and regulations	
Service life	Service life	Corresponding to the service life of the building or structure	
	In-use conditions reference	Corresponding to the service conditions of the building or structure	
Manufacturing site(s)		Chiba Plant (East Japan Business Office, Fuji Light Metal Co, Ltd.)	
Product description		All aluminum extrusions for windows, sashes, and related products manufactured at the above-mentioned production sites (made from 100% green aluminum).	
Website		https://www.fujisash.co.jp/hp/company/csr/	

* TS: technical specifications,

● Product Content

Product components	Propotion (%)	Mass (unit)	
aluminum	the balance (98% or more)	the balance (98% or more)	kg
magnesium	0.45~0.9	0.0045~0.009	kg
silicon	0.20~0.6	0.0020~0.006	kg
Packaging materials	Propotion (%)	Mass (unit)	
-	-	-	

● Biogenic Carbon Content

Item	Content (kg-C)	Content (kg-CO ₂ eq)
Biogenic carbon content per product	-	-
Biogenic carbon content in packaging	-	-

● LCA-related Information

> EPD Type Information

EPD type	Product type	<input type="checkbox"/> Single product EPD	<input checked="" type="checkbox"/> Multiple products EPD	<input type="checkbox"/> Industry-wide EPD
	Site type	<input checked="" type="checkbox"/> Single site		<input type="checkbox"/> Multiple sites
	Value	<input type="checkbox"/> Specific	<input checked="" type="checkbox"/> Average	<input type="checkbox"/> Representative
Geographical coverage		Japan		
Description of representativeness for multiple-products/sites EPD		<p>This is a single-site group product EPD. The activity data for each item required to produce 1 kg of aluminum extruded profiles are aggregated and calculated with consideration of yield losses, and multiplied by IDEA emission factors. Within the same site, the types of raw materials, electricity, and fuels used are common. As this EPD is based on a cradle-to-gate approach, processes after shipment are excluded from the scope of calculation.</p>		
Description of variation for multiple-products/sites EPD		<p>Although mass differences arise in final products that use this EPD as an intermediate product (extruded profiles), this EPD is calculated on a mass basis per declared unit of the extruded profile.</p>		
Description of products covered in the multiple products EPD		<p>Although there are multiple products, the differences among them arise from variations in mass due to differences in the cross-sectional shapes of the extrusions. However, this EPD is calculated based on the mass per declared unit of the extrusion, and since there is only one production site, there are no differences in the environmental impact assessment results among the products.</p>		

> LCA Information

Declared unit	kg	
Mass per declared unit (Conversion factor to mass)	1kg	
Reference flow (number of products required to fulfil the function)	Not applicable.	
System boundary	<input checked="" type="checkbox"/> Cradle-to-Gate <input type="checkbox"/> Cradle-to-Gate with options <input type="checkbox"/> Cradle-to-Grave	
LCA software	MiLCA ver.1.2.0.8	
LCI database	IDEA Ver.3.4	
Characterization model	GWP IPCC2021 with LULUCF 100a, LIME2	
Use of other background data	None	
Secondary data quality	The calculation was conducted using data that meet the secondary data quality requirements specified by GPI. Data quality assessment was carried out in accordance with ISO 14044:2006 (Environmental management - Life cycle assessment - Requirements and guidelines), Clause 4.2.3.6.	
Primary data collection sites	Chiba Plant (East Japan Business Office, Fuji Light Metal Co, Ltd.)	
Primary data collection period	2023/4/1～2024/3/31	
Biogenic carbon	<input checked="" type="checkbox"/> 0/0 approach <input type="checkbox"/> -1/+1 approach	
Information about electricity	Use	<input checked="" type="checkbox"/> Average consumption mix <input type="checkbox"/> Others
	Type	—
	Purchase date	—
Issuing body		

> Modules

Production stage			Construction stage		Use stage							End-of-life stage				Suppl. info
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	
Extraction and upstream production	Transport to factory	Manufacturing	Transport to site	Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction / Demolition	Transport to waste processing or disposal	Waste processing	Disposal of waste	D
■	■	■	—	—	—	—	—	—	—	—	—	—	—	—	—	—

■ : declared module — : module not declared

> Allocation

In this calculation, process subdivision and allocation were examined in accordance with the procedures described in the GPI. In this manufacturing process, extruded profiles for applications other than windows and sashes are also produced as co-products. As it is difficult to avoid allocation through process subdivision, and since the economic value of both products discharged from the process is equivalent, physical allocation was applied.

> Cut-off rules

No cut-off was applied based on the cut-off criterion (less than 1% by mass).

In accordance with the PCR cutoff criteria, a cutoff was applied to consumables for equipment.

> System Boundary

Based on the PCR, the product was defined as an aluminum extrusion (intermediate product). Specifically, the system boundary covers the manufacturing stage, including A1 (raw material supply), A2 (transport to the manufacturing plant), and A3 (production). Processes other than the declared system boundary were not excluded, nor were any processes outside the system boundary included in the calculation. The temporal system boundary is 100 years.


> Scenario

Modules	Description
A2	Transport distances were determined based on PCR scenarios and calculations using Google Maps, or by using the FD-02-03_1_Country/Region Distance Database. In addition, the PCR scenarios were applied for the transport modes (vehicle type and loading rate) and the end-of-life stage.

> Electricity Modelling

In the raw material supply stage, the green billets (purchased billets) are manufactured in New Zealand. Therefore, for the bauxite mining through alumina and anode production processes, Australia was set as the country of production and Australia's 2021 national average electricity data were applied. For the billet manufacturing process, New Zealand's 2021 national average electricity data were used. In the manufacturing stage, since production takes place in Japan, the 2021 national average grid electricity data for Japan were applied in the calculation.

> Life Cycle System Diagram

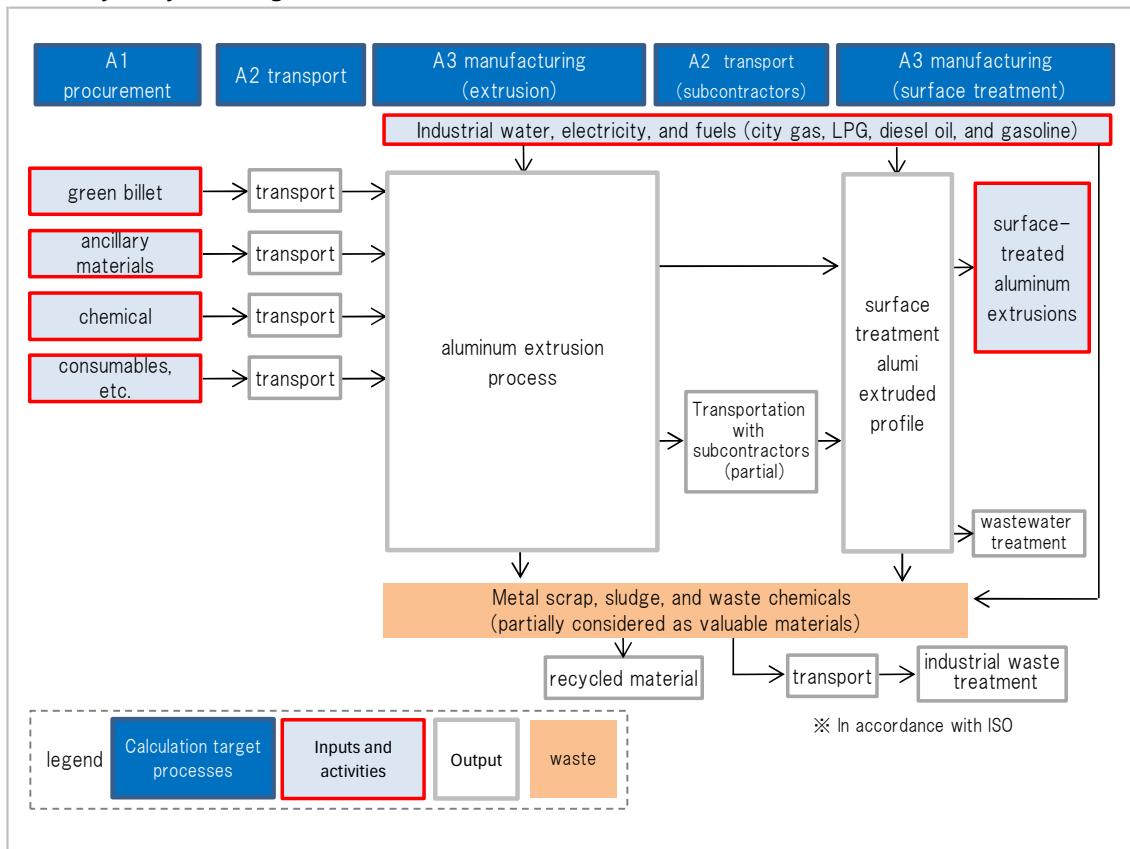

Environmental Product Declaration for Reborn Low-Carbon Aluminum Building Materials "ReSash Green"

LCA Result

> LCIA Indicators

> LCI - Primary Resource Use

*RPRE: Renewable primary resources used as an energy carrier, RPRM: Renewable primary resources with energy content used as material, NRPRE: Non-renewable primary resources used as an energy carrier, NRPRM: Non-renewable primary resources with energy content used as material

> LCI- Secondary Resources Use

> LCI - ADP-fossil and Consumption of freshwater

Environmental Product Declaration for Reborn Low-Carbon Aluminum Building Materials "ReSash Green"

> Waste Indicators

> Output Flow Indicators

> Description of LCA Results

- Since this is a pre-sale product, the calculation was performed using the same data as that of a similar product for which an EPD has been obtained, in order to ensure data quality. Although the data collection period is FY2023, the same production technologies and equipment are used in FY2024, and production volumes and conditions are standardized; therefore, measured data for one year of production equivalent to FY2023 were used.
- No primary aluminum is used; only recycled ingots, return materials, and post-consumer aluminum are utilized.
- The EPD may be updated or withdrawn if circumstances change. To confirm the latest version and validity of the EPD, please refer to the following: <https://ecoleaf-label.jp/epd/>

● Additional Environmental Information

> Additional Environmental Information not related to LCA

The product is manufactured at a factory certified to ISO 14001.

> Information on Hazardous Substances

Hazardous materials name	CAS No.	Standards or regulations
nickel sulfate	7786-81-4	Priority Assessment Chemical Substances (The Chemical Substances Control Law): Used in surface treatment processes at the plant
Boric acid	10043-35-3	Class I designated chemical substances (PRTR): Used in surface treatment processes at the plant

Release of dangerous substances from construction products

No release of hazardous substances is expected from the aluminum extruded profiles.

● Definitions of Terms

—

● References

- ISO14025:2006 Environmental labels and declarations — Type III environmental declarations — Principles and procedures
- ISO14040:2006 Environmental management - Life Cycle Assessment - Principles and framework
- ISO14044:2006 Environmental management - Life Cycle Assessment - Requirements and guidelines
- ISO21930:2007 Sustainability in building construction — Environmental declaration of building products
- ISO14067:2018 Greenhouse gases — Carbon footprint of products — Requirements and guidelines for quantification