Japan EPD Program by SuMPO

Sustainable Management Promotion Organization 2-1, Kaji-cho 2 chome, Chiyoda-ku, Tokyo Japan https://ecoleaf-label.jp/



Multifunction Color Laser Printer Xerox VersaLink C7130 Color Multifunction Printer (3TM)

FUJIFILM Business Innovation Corp.

Functional unit

Per unit of product

System boundary

■ final products □intermediate products

Material - Product - Distribution - use - Disposition

Main specifications of the product

Model: Xerox VersaLink C7130 Color Multifunction Printer (3TM)

- Color Multifunction Printer (EP Type)
- Print Speed:Color 30ppm(Letter LEF) Monochrome 30ppm(Letter LEF)
- Paper Size (Max.):297x431.8mm
- Print /Copy/Scan/FAX
- Automatic 2 sided Printing

Company Information

FUJIFILM Business Innovation Corp.

https://www.fujifilm.com/fbglobal/eng

6-1 Minatomirai, Nishi-ku, Yokohama-shi, Kanagawa

	F	Registration#	JR-AI-22012E-B		
		PCR number	PA-590000-AI-04		
		PCR name	Imaging input and/or output equipment		
1)	Pı	ublication date	2022/10/31		
	Ve	erification date	2022/1/21		
	Ve	rification method	System certificaion		
		Verification#	2021-FB-EL-012		
	Е	xpiration date	2027/1/20		
	PCR review was conducted by:				
		Approval date	2022/4/1		
		PCR review	Masayuki Kanzaki		
		panel chair	(Sustainable Management Promotion Organization)		

Third party verifier*


Sachiko Hashizume

Independent verification of data & declaration in accordance with ISO14025

> □internal ■ external


Registration number: JR-AI-22012E-B

^{*}Auditor's name is stated if system certification has been performed.



Japan EPD Program by SuMPO

Sustainable Management Promotion Organization 2-1, Kaji-cho 2 chome, Chiyoda-ku, Tokyo Japan https://ecoleaf-label.jp/

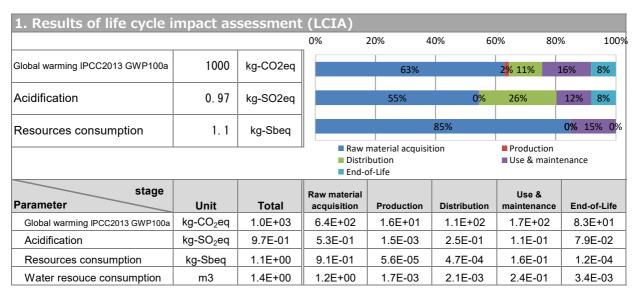

2. Life cycle inventory analysis (LCI)				
項目		単位		
Non-renewable material resources	6.7E+01	kg		
Renewable material resources	2.2E+02	kg		
Consumption of fresh water	9.9E+02	m3		

3. Material composition				
Material		Unit		
Steel	33	kg		
Plastic	37	kg		
SUS	6.5	kg		
Conversion parts	4.7	kg		
Circuit Board	2.5	kg		
Glass	2.3	kg		
Aluminium	1.9	kg		
Other metal	0.12	kg		
Rubber	0.40	kg		
Others	2.4	kg		

5. Additional explanation

- -Product destination: North America
- -Calculated by the standard Scenario for MFP (EP type).
- -Assumed lifespan of the product is five years.
- -Printing paper is excluded from the use and maintenance stage.
- -Electric power in the use and maintenance stage is calculated by TEC value, measured according to International ENERGY STAR program Version3.0 and the public electric-power-consumption-rate in the United States.



Japan EPD Program by SuMPO

Sustainable Management Promotion Organization 2-1, Kaji-cho 2 chome, Chiyoda-ku, Tokyo Japan https://ecoleaf-label.in/

6-1. Supplementary environmental information

ENERGY STAR® Ver.3.0 qualified.

Minimum of 5 weight percent of post-consumer recycled plastic is contained per the total weight of plastic in the product.

7. Assumptions of secondary data used

Inventory Database: IDEA v2.1.3 and registered data v1.10 of Ecoleaf Environmental Labeling Program are used.

8. Remarks

Revised on October 31st, 2022:

- ①Added the parameter "Water resouce consumption".
- 2) Added the parameter "Consumption of freshwater".
- ⑥-1 Added information about the post-consumer recycled plastic content in the product.

Revised on March 8th, 2022.

Correction of paper size to declare print speed, and maximum paper size.

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied. (Reference URL: https://ecoleaf-label.jp/regulation/)

Registration number: JR-AI-22012E-B