




JFE Steel Corporation

SUPER HISLEND-H®



Products Photo

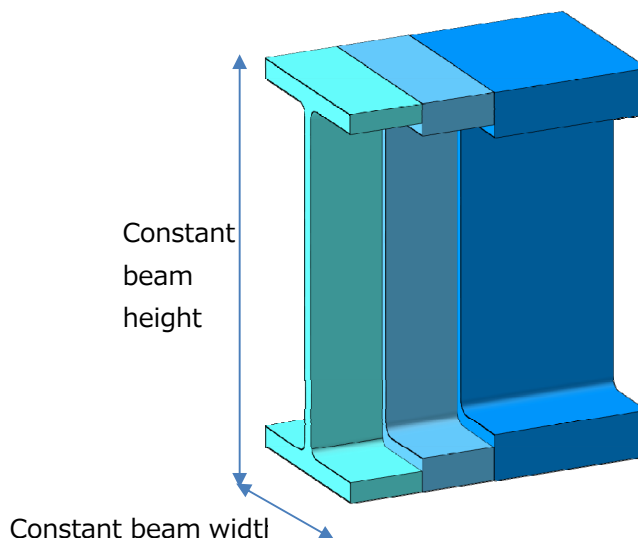

Functional unit

1 metric ton

System boundary

final products intermediate products

Production stage (Raw material supply,
Transport to factory, Manufacturing)
and Recycling potential

Main specifications of the product

Production Site:

West Japan Works (Kurashiki, Fukuyama)

Representative Standards:

Listed on Page 3 (8. Remarks)

Shape: Wide Flange Shapes (In the case of a type
that makes the external law constant)

Representative Section and Thickness:

(Unit: mm, t: thickness)

H400(t9)×200(t12) - 1000(t19)×400(t40)

Registration#	JR-AJ-22016E-B
PCR number	PA-180000-AJ-06
PCR name	Steel products for construction
Publication date	1 August 2022
Verification date	14 February 2025
Verification method	Product-by-product
Verification#	JV-AJ-24054
Expiration date	19 July 2028
PCR review was conducted by:	
Approval date	10 May 2023
PCR review panel chair	Yasunari Matsuno (Chiba University)

Third party verifier*

Takahiro Atoh

Independent verification of data & declaration in
accordance with ISO14025 and ISO21930

internal external

*Auditor's name is stated if system certification has been performed.

Company Information

JFE Steel Corporation Planning & Marketing Dept., Construction Materials & Services Business Division

<https://www.jfe-steel.co.jp/en/index.html>

1. Results of life cycle impact assessment (LCIA)

Parameter \ Stage	Production stage and Recycling potential [A1],[A2],[A3] and [D]	Production stage (cradle to gate) [A1],[A2] and [A3]	Unit
Global warming IPCC2013 GWP100a	2.1E+03	3.2E+03	kg-CO ₂ eq
Acidification	-9.2E-01	7.3E-01	kg-SO ₂ eq
Photochemical ozone	2.6E-02	4.6E-02	kg-PO ₄ ³⁻ eq

Parameter \ Stage	Unit	Total	[A1] Raw material supply	[A2] Transport to factory	[A3] Manufacturing	[D] Recycling potential
Global warming IPCC2013 GWP100a	kg-CO ₂ eq	3.2E+03	8.0E+02	1.2E+01	2.3E+03	-1.1E+03
Ozone layer destruction	kg-CFC-11eq	1.9E-07	1.1E-07	7.8E-11	7.7E-08	-2.0E-07
Acidification	kg-SO ₂ eq	7.3E-01	3.9E-01	5.5E-02	2.9E-01	-1.7E+00
Photochemical ozone	kg-C ₂ H ₄ eq	9.4E-03	6.4E-03	1.1E-03	1.9E-03	-2.3E-01
Eutrophication	kg-PO ₄ ³⁻ eq	4.6E-02	1.2E-05	7.0E-14	4.6E-02	-2.0E-02

2. Life cycle inventory analysis (LCI)

Parameter	Unit	Unit
Non-renewable material resources	1.5E+03	kg
Non-renewable energy resources	3.7E+04	MJ
Renewable material resources	9.5E+02	kg
Renewable primary energy	1.2E+02	MJ
Consumption of freshwater	9.7E-01	m ³

3. Material composition

Material	Unit	Unit
iron [Fe]	≥95.6	wt%
carbon [C]	≤0.25	wt%
silicon [Si]	≤0.65	wt%
manganese [Mn]	≤1.65	wt%
phosphorus [P]	≤0.05	wt%
sulfur [S]	≤0.05	wt%
copper [Cu]	≤0.55	wt%
chromium [Cr]	≤0.75	wt%
nickel [Ni]	≤0.30	wt%
vanadium [V]	≤0.10	wt%

4. Waste to disposal

Parameter	Unit	Unit
Hazardous waste	0.0E+00	kg
Non-hazardous waste.	2.0E+00	kg

*Data derived from LCA and not assigned to the impact categories of LCIA

5. Additional explanation

- This EPD shows the results calculated without applying system extensions.
- Scrap recycling potential is calculated based on ISO 20915/JIS Q 20915 and shown as [D] in table 1. Recycling ratio used in this calculation is 93.0%. (Using data is 2018FY from The Japan Iron and Steel Federation, The Japan ferrous raw materials association and The Japan Steel Can recycling Association).
- The environmental impact of self-generated electricity was calculated as primary data of fuel and the basic unit data of grid power consumption is the average of 10 electric power suppliers of Japan in 2014FY.
- Each item (except iron) in table 3 is the maximum value of all product standards covered by this EPD.
- Primary data in 2018 is used.

6-1. Supplementary environmental information

The production site is certified to ISO 14001.

6-2. Regulated hazardous substances

Substance	CAS No.	Reference to standards or regulations
manganese [Mn]	7349-96-5	• Industrial Safety and Health Act
copper [Cu]	7440-50-8	• Industrial Safety and Health Act
nickel [Ni]	7440-02-0	• Industrial Safety and Health Act
chromium [Cr]	7440-47-3	• Industrial Safety and Health Act
molybdenum [Mo]	7439-98-7	• Industrial Safety and Health Act
cobalt [Co]	7440-48-4	• Industrial Safety and Health Act

7. Assumptions of secondary data used

IDEA v2.1.3 database is used. Steel scrap data (JP-AJ-0001) from the Japan Iron and Steel Federation are used.

8. Remarks

Representative standards:

SN400A, SN400B, SN400C, SN490B, SN490C,
SM400A, SM400B, SM400C, SM490A, SM490B, SM490C, SM520B, SM520C, SM490YA, SM490YB,
SS400, SMA400AW, SMA400BW, SMA400AP, SMA400BP, SMA490AW, SMA490BW, SMA490AP, SMA490BP,
HBL[®]-H355B, HBL[®]-H355C, S275JR, S275J0, S355JR, S355J0 and others

- July, 2023; Correction of double counting on upstream and modification of allocation method of by-product gases
- February, 2025; Modification about system boundary and allocation of by-product gases.

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.
(Reference URL : <https://ecoleaf-label.jp/regulation/>)