



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-22202E-A

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization

2-1, Kaji-cho 2 chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>



SHARP

Sharp Corporation

DIGITAL MULTIFUNCTIONAL SYSTEM

BP-70M55

Functional unit

Per unit of product

System boundary

■ final products □ intermediate products

Raw material acquisition, Production, Distribution,
Use & maintenance, End-of-Life

Main specifications of the product

Model name : BP-70M55

Marking technologies : Electrophotographic Printer (EP)

Print speed : Monochrome 55prints/minute (A4)

Maximum Paper Size : A3W

Duplex copying : Standard

Company Information

SHARP CORPORATION

Smart Business Solutions BU

E-mail : ECOLEAF-BS@sharp.co.jp

Registration#	JR-AI-22202E-A
PCR number	PA--590000-AI-04
PCR name	Imaging input and/or output equipment
Publication date	9/20/2022
Verification date	9/7/2022
Verification method	Product-by-product
Verification#	JV-AI-22202
Expiration date	9/6/2027
PCR review was conducted by:	
Approval date	4/1/2022
PCR review	Masayuki Kanzaki
panel chair	(Sustainable Management Promotion Organization)

Third party verifier*

Takahiro Atoh

Independent verification of data & declaration in
accordance with ISO14025

internal


external

*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-22202E-A



1. Results of life cycle impact assessment (LCIA)

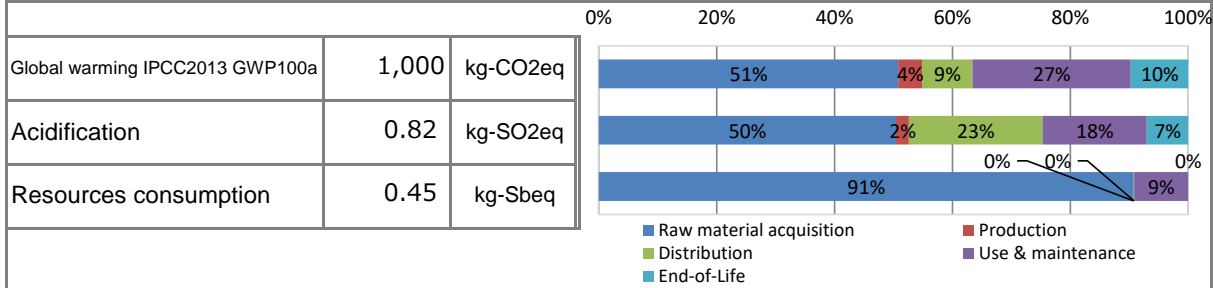

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO ₂ eq	1.0E+03	5.3E+02	4.2E+01	8.9E+01	2.8E+02	1.0E+02
Acidification		kg-SO ₂ eq	8.2E-01	4.1E-01	1.8E-02	1.9E-01	1.5E-01	5.8E-02
Resources consumption		kg-Sbeq	4.5E-01	4.1E-01	1.2E-04	3.7E-04	4.1E-02	9.8E-05

2. Life cycle inventory analysis (LCI)

Parameter	Unit	Unit
Non-renewable material resources	5.6E+01	kg
Renewable material resources	1.2E+02	kg

3. Material composition

Material	Unit	Unit
Steel	3.1E+01	kg
SUS	1.5E+00	kg
Aluminium	1.9E-01	kg
Other metal	2.1E-01	kg
Plastic	3.0E+01	kg
Rubber	2.2E-01	kg
Glass	1.9E+00	kg
Paper · Wood	1.3E+01	kg
Circuit Board	2.0E+00	kg
Others	4.8E+00	kg

5. Additional explanation

- Product destination: North America
 - Calculation method of use stage (scenario)
 - Expected usage period: five years
 - Estimated number of use : 451,200 sheets
 $32 \text{ (Jobs/Day)} \times 47 \text{ (Sheets/Job)} \times 5 \text{ (Days/Week)} \times 4 \text{ (Weeks/Month)} \times 12 \text{ (Months/Year)} \times 5 \text{ (Years)} = 451,200 \text{ sheets}$
 - LARGE CAPACITY TRAY, EXIT TRAY UNIT, SADDLE STITCH FINISHER, FOLDING UNIT, and STAND/550&2100 SHEET PAPER DRAWER are optional, their impact is not included.
 - The impact of paper for printing is not included.
 - Products selected in the scenario used for inventory calculation : Multifunction device (EP)
- ※ Conforms to the International ENERGY STAR® Program Ver.3.0.



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-22202E-A

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization

2-1, Kaji-cho 2 chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>

6-1. Supplementary environmental information

- Conforms to the International ENERGY STAR® Program Ver.3.0.
- Compliant with European RoHS regulations.
- Assembly and production of this product, as well as production of the photoconductor and toner, which are the main components, are performed at ISO 14001-certified factories.

7. Assumptions of secondary data used

IDEA v2.1.3 and Japan EPD Program by SuMPO Registry data v1.11

8. Remarks

Revised on December 9th, 2022.

Fixed entry leakage of print speed.

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

Registration number : JR-AI-22202E-A