



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-23152E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan
<https://ecoleaf-label.jp/>



A3 Color Multifunction Printer

Apeos C5570 (Model-PFS-2TS)

FUJIFILM
Value from Innovation

富士フイルム ビジネス イノベーション株式会社
FUJIFILM Business Innovation Corp.

Apeos, Apeos logo and ApeosPlus are registered trademarks or trademarks of FUJIFILM Business Innovation Corp. in Japan and/or other countries

Functional unit

Per unit of product

System boundary

■ final products intermediate products
Raw material acquisition, Production, Distribution,
Use & Maintenance, End-of-Life

Main specifications of the product

- Model: Apeos C5570 (Model-PFS-2TS)
- Color Multifunction Printer (EP Type)
- Print Speed (A4 LEF): Color 55ppm, Monochrome 55ppm
- Paper Size (Max.): SRA3(320x450mm)
- Copy / Print / Scan / Fax
- Automatic 2 Sided Output,
Automatic Document Feeder

Company Information

FUJIFILM Business Innovation Corp.

6-1 Minatomirai, Nishi-ku, Yokohama-shi, Kanagawa Japa

<https://www.fujifilm.com/fbglobal/eng>

Registration#	JR-AI-23152E
PCR number	PA-590000-AI-07
PCR name	Imaging input and/or output equipment
Publication date	8/25/2023
Verification date	8/18/2023
Verification method	System certificaion
Verification#	2023-FB-EL-002
Expiration date	8/17/2028

PCR review was conducted by:

Approval date	4/24/2023
PCR review panel chair	Masayuki Kanzaki Sustainable Management Promotion Organization

Third party verifier*

Sachiko Hashizume

Independent verification of data & declaration in accordance with ISO14025


internal external

*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-23152E



1. Results of life cycle impact assessment (LCIA)

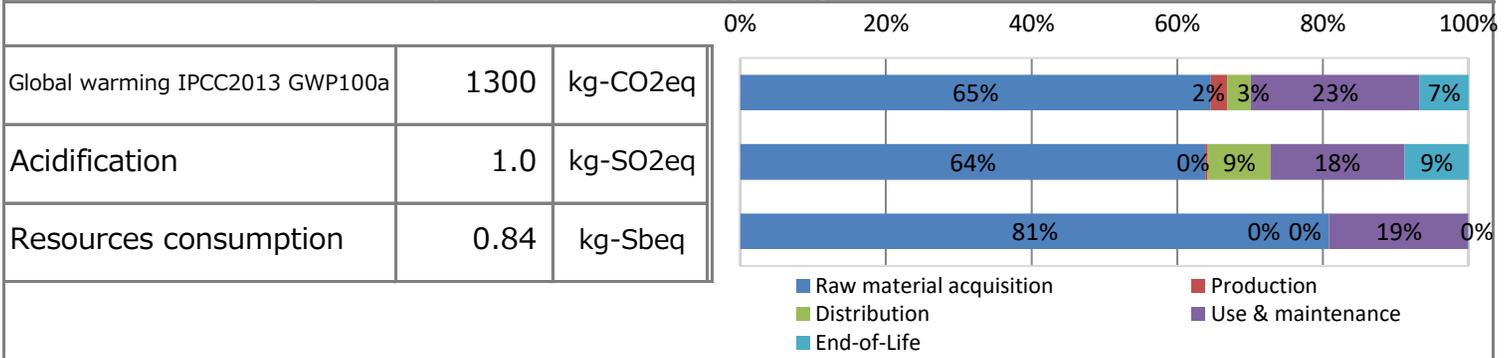

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO ₂ eq	1.3E+03	8.6E+02	3.0E+01	4.3E+01	3.1E+02	9.0E+01
Acidification		kg-SO ₂ eq	1.0E+00	6.5E-01	3.4E-03	8.8E-02	1.9E-01	9.0E-02
Resources consumption		kg-Sbeq	8.4E-01	6.8E-01	1.4E-04	1.9E-04	1.6E-01	1.6E-04

2. Life cycle inventory analysis (LCI)

Parameter	Unit
Non-renewable material resources	1.1E+02 kg
Renewable material resources	2.8E+02 kg

3. Material composition

Material	Unit
Steel	58 kg
SUS	2.0 kg
Aluminium	0.92 kg
Other Metals	7.3 kg
Plastic	38 kg
Rubber	0.21 kg
Glass	2.1 kg
Paper, Wood	7.7 kg
Circuit Board	4.5 kg
Conversion Parts	4.7 kg
Others	4.2 kg

5. Additional explanation

- ✓ Product destination: Japan
- ✓ Calculated based on standard scenario for MFP (EP type).
- ✓ Printing paper is excluded from Use & maintenance stage.
- ✓ Electric power of Use & maintenance stage is calculated based on TEC value, measured according to ENERGY STAR® Version 3.0.
- ✓ Assumed print volume are 451,200 sheets.
 $1/4 \times 32 \text{ (jobs per day)} \times 47 \text{ (sheets per job)} \times 5 \text{ (days)} \times 4 \text{ (weeks)} \times 12 \text{ (months)} \times 5 \text{ (years)} = 451,200 \text{ (sheets)}$



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-23152E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan
<https://ecoleaf-label.jp/>

6-1. Supplementary environmental information

ENERGY STAR® Ver.3.0 qualified.

7. Assumptions of secondary data used

Inventory Database: LCI Database IDEA v2.1.3, Japan EPD Program by SuMPO registered data v1.13.

8. Remarks

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

Registration number : JR-AI-23152E