

## Japan EPD Program by SuMPO

Sustainable Management Promotion Organization 14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan https://ecoleaf-label.jp/

## RICOH COMPANY, LTD

RICOH imagine. change.

Color MFP (Electrophotography)

# **IM C7010**



#### **Functional unit**

Per product

## **System boundary**

■ final products □intermediate products

Raw material acquisition, Production, Distribution,

Use & maintenance, End-of-Life

## Main specifications of the product

Product name: RICOH IM C7010

Main specifications:

Color MFP (Electrophotography)

Print Speed: 70 prints/minute (A4)

Maximum Paper Size: 11" x 17"

Included Units in Assessment : Automatic Reversing

Document Feeder, Automatic Duplexing Unit

## **Company Information**

RICOH COMPANY,LTD Tel:(03) 3777-8111

Registration#	JR-AI-23429E-A	
PCR number	PA-590000-AI-08	
PCR name	Imaging input and/or output equipment	
<b>Publication date</b>	1/24/2024	
<b>Verification date</b>	11/22/2023	
Verification method	Product-by-product	
Verification#	JV-AI-24003	
<b>Expiration date</b>	11/21/2028	
PCR review was conducted by:		
Approval date	9/1/2023	
PCR review	Masayuki Kanzaki	
panel chair	(SuMPO)	

## Third party verifier\*


Takahiro Atou

Independent verification of data & declaration in accordance with ISO14025

□internal **■** external


Registration number: JR-AI-23429E-A

 $<sup>\</sup>hbox{*Auditor's name is stated if system certification has been performed.}\\$ 




## **Japan EPD Program by SuMPO**

Sustainable Management Promotion Organization 14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan https://ecoleaf-label.jp/

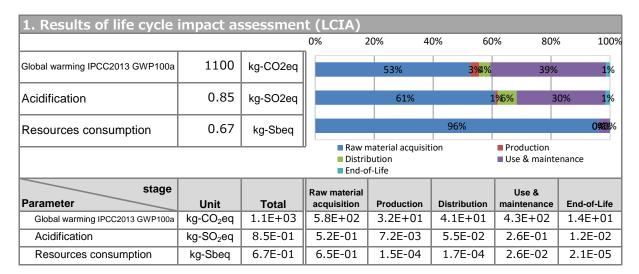

2. Life cycle inventory analysis (LCI)			
Parameter		Unit	
Non-renewable material resources	8.5E+01	kg	
Renewable material resources	1.4.E+02	kg	

3. Material composition			
Material		Unit	
SUS	1.9E+00	kg	
Aluminum	1.7E+00	kg	
Ordinary steel	4.9E+01	kg	
Other metals	3.4E+00	kg	
Thermoplastic resin	4.0E+01	kg	
Thermosetting resin	2.1E+00	kg	
Glass	2.3E+00	kg	
Rubber	7.9E-01	kg	
Paper	1.6E+01	kg	
Lubricant	4.1E-03	kg	
Mounting circuit board	1.9E+00	kg	
Wood	5.7E-04	kg	



#### Japan EPD Program by SuMPO

Sustainable Management Promotion Organization 14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan https://ecoleaf-label.jp/

\*Data derived from LCA and not assigned to the impact categories of LCIA

#### 5. Additional explanation

Products selected in the scenario used for load calculation

- --Multifunction device (EP)
- ∙ Product destination: DOM ※
- \*\*Transportation scenarios are for China, Thailand, and Ricoh Group.from three production sites in Japan,

  North America, Europe, on transportation routes to the five poles of China, Oceania and Japan transport load

  calculate the weighted average of transportation activity per kg of product from the total calculated using

  the annual production volume for each pole .Then, it is used as a transportation unit of calcuration.
- · Expected usage period: 5 years
- Estimated number of sheets:729,600sheets ※
- \*Compatible with International Energy Star Program Ver.3.0
- -The load on the image output medium (printing paper) is not included.

#### 6-1. Supplementary environmental information

Compliant with the International Energy Star Program Ver.3.0. It also complies with the European RoHS Directive.

Assembly production of this product and production of the main parts, photoconductor and toner, are carried out at an ISO14001 certified factory.

Certification number:BSI-EMS646026 JQA – E-70001 https://jp.ricoh.com/sustainability/environment/management/iso

## 7. Assumptions of secondary data used

IDEA v2.1.3, and registered data of Japan EPD Program by SuMPO v1.13 are used.

## 8. Remarks

Contents:

Date of change: February 26, 2024 Changed to deleted content as logo is not needed

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied. (Reference URL: https://ecoleaf-label.jp/regulation/)

Registration number: JR-AI-23429E-A