



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AJ-19002E-B

Japan EPD Program by SuMPO


Sustainable Management Promotion Organization

14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp>

NIPPON STEEL | NIPPON STEEL CORPORATION

Wide flange shapes

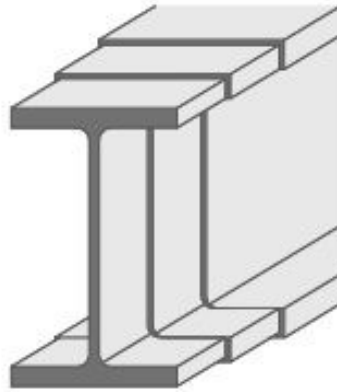

Functional unit

1 t

System boundary

 final products intermediate products

Production Stage and optional supplementary information

Main specifications of the product

Production sites : Kashima ,Kimitsu and Wakayama Works

Main standards :

SN400A,SN400B,SN490B,SM400A,SM400B,SM490A,
SM490B,SM490YA,SM490YB,SS400,SMA400AW,
SMA400BW,SMA490AW,SMA490BW

Type : H-shape

Main sizes(unit:mm,t:thickness) (ex.middle type)

H150(t 6)×B100(t 9) ~H900(t19)×B400(t37)

Company Information

NIPPON STEEL CORPORATION

<https://www.nipponsteel.com/en/product/construction/>

Registration#	JR-AJ-19002E-B
PCR number	PA-180000-AJ-06
PCR name	Steel products for construction
Publication date	12/6/2019
Verification date	1/12/2024
Verification method	Product-by-product
Verification#	JV-AJ-24001
Expiration date	11/28/2024
PCR review was conducted by:	
Approval date	5/10/2023
PCR review	Yasunari Matsuno
panel chair	Chiba University

Third party verifier*

Yasuo Koseki

Independent verification of data & declaration in accordance with ISO14025 and ISO21930.

 internal external

*Auditor's name is stated if system certification has been performed.

Registration number : JR-AJ-19002E-B



1. Results of life cycle impact assessment (LCIA)

Parameter	Stage	[A1~A3] + [D]	[A1~A3]	Unit
Global warming IPCC2013 GWP100a		1200	2300	kg-CO2eq
Acidification		0.18	2.0	kg-SO2eq
Photochemical ozone		-0.13	0.12	kg-C2H4eq

Table Legend

【A1】: Raw mterial supply
 【A2】: Transport to factory
 【A3】: Manufacturing
 【D】: Recycling potential
 【A1~A3】:sum of 【A1】,【A2】and【A3】(cradle to gate)
 【A1~A3】+【D】: sum of 【A1】,【A2】,【A3】and 【D】(cradle to

Parameter	stage	Unit	[A1~A3]	[A1]	[A2]	[A3]	[D]
Global warming IPCC2013 GWP100a		kg-CO ₂ eq	2.3E+03	5.4E+02	1.1E+02	1.7E+03	-1.2E+03
Ozone layer destruction		kg-CFC-11eq	4.2E-07	2.4E-07	7.1E-10	1.9E-07	-2.1E-07
Acidification		kg-SO ₂ eq	2.0E+00	5.7E-01	6.4E-02	1.3E+00	-1.8E+00
Photochemical ozone		kg-C ₂ H ₄ eq	1.2E-01	5.1E-03	1.0E-03	1.1E-01	-2.5E-01
Eutrophication		kg-PO ₄ ³⁻ eq	5.6E-02	6.2E-03	6.4E-13	5.0E-02	-2.1E-02

2. Life cycle inventory analysis (LCI)

Parameter	Unit
Non-renewable material resources	7.3E+02 kg
Non-renewable energy resources	2.6E+04 MJ
Renewable material resources	9.5E+02 kg
Renewable primary energy	-1.1E+01 MJ
Consumption of freshwater	8.8E-01 m ³

3. Material composition

Material	Unit
iron [Fe]	≥95.8 %
carbon [C]	≤0.25 %
silicon [Si]	≤0.65 %
manganese [Mn]	≤1.65 %
phosphorus [P]	≤0.05 %
sulfur [S]	≤0.05 %
copper [Cu]	≤0.50 %
chrominium [Cr]	≤0.75 %
nickel [Ni]	≤0.30 %

4. Waste to disposal

Parameter	Unit
Hazardous waste	0.00E+00 kg
Non-hazardous waste.	3.50E+00 kg

5. Additional explanation

- Each LCI includes allocation for scrap recycling as an optional supplementary information [D]. Recycling rate (RR) used in this calculation is 93.1% (calculated based on ISO 20915/JIS Q 20915 and using Japan data from Japan Iron and Steel Federation and Japan Steel Can Recycling Association).
- Scenarios of transport to site follow the PCR.
- Each item (except iron) in table 3 is the maximum value of the standards of the products.
- The average grid power supply of 10 electric power suppliers of Japan in 2014 is used in the LCI calculation for grid electricity.
 - Following standards are available on made-to-order basis, in addition to the regular standards listed on sheet 1:
 - SN400C, SN490C
 - The products of following sizes are also available:
 - wide type/ H100(t6) × B100(t8)~H400(t45) × B400(t70)
 - narrow type/ H150(t5) × B75(t7)~H600(t11) × B200(t17)

*Data derived from LCA and not assigned to the impact categories of LCIA



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AJ-19002E-B

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan
<https://ecoleaf-label.jp>

6-1. Supplementary environmental information

Kashima Works, Kimitsu works and Wakayama Works are certified to ISO 14001.

6-2. Regulated hazardous substances

Substance	CAS No.	Reference to standards or regulations
manganese [Mn]	7439-96-5	Industrial Safety and Health Act
copper [Cu]	7440-50-8	Industrial Safety and Health Act
chrominium [Cr]	7440-47-3	Industrial Safety and Health Act
nickel [Ni]	7440-02-0	Industrial Safety and Health Act

7. Assumptions of secondary data used

We use the IDEA2.1.3 data and steel scrap data from The Japan Iron and Steel Federation (JISF).

8. Remarks

6/12/2021 Table Legend and 5. Additional explanation added and amended in accordance with the declaration published in Japanese.

• January 2024; Modification about allocation method of by-product gases

- For data quantification, please refer to the PCR and the Rules on Quantification and Declaration.
- Comparative assertion is permitted only when the Rules on Quantification and Declaration are satisfied.
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

Registration number : JR-AJ-19002E-B