

#### **Ecoleaf Environmental Labeling Program**

Sustainable Management Promotion Organization 2-1, Kaji-cho 2 chome, Chiyoda-ku, Tokyo Japan https://ecoleaf-label.jp/

Color Printer (Electrophotography)

### RICOH COMPANY, LTD

# RICOH imagine. change.



## **PRO C7200e**



#### **Functional unit**

Per product

#### **System boundary**

■ final products □intermediate products

Raw material acquisition, Production, Distribution,

Use & maintenance, End-of-Life

#### Main specifications of the product

Product name: PRO C720 (Product destination: NA

Main specifications:

Printer (Electrophotography)

Print Speed: 85 prints/minute (A4)
Maximum Paper Size: 11" x 17"

Included Units in Assessment : Automatic Reversing

Document Feeder, Automatic Duplexing Unit

#### **Company Information**

RICOH COMPANY,LTD Tel:(03) 3777-8111

Registration#	JR-AI-21070E			
PCR number	PA-590000-AI-03			
PCR name	Imaging input and/or output equipment			
<b>Publication date</b>	5/28/2021			
<b>Verification date</b>	5/18/2021			
Verification method	System certificaion			
Verification#	JV-AI-20121			
<b>Expiration date</b>	5/17/2026			
PCR review was conducted by:				
Approval date	11/8/2019			
PCR review	Masayuki Kanzaki			
panel chair	(SuMPO)			

#### Third party verifier\*

Yasuo Koseki

Independent verification of data & declaration in accordance with ISO14025

□internal **■** external

Registration number: JR-AI-21070E


 $<sup>\</sup>hbox{*Auditor's name is stated if system certification has been performed.}\\$ 

**Ecoleaf Environmental Labeling Program** 

Sustainable Management Promotion Organization 2-1, Kaji-cho 2 chome, Chiyoda-ku, Tokyo Japan https://ecoleaf-label.jp/

Type III Environmental Declaration (EPD) Registration number: JR-AI-21070E

Global warming IPCC2013 GWP100a 11000 kg-CO2eq Acidification 7.9 kg-SO2eq Resources consumption 1.5 kg-Sbeq

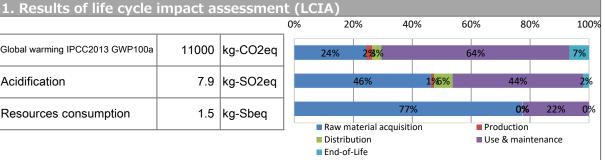

			Raw				
stage			material			Use &	
Parameter	Unit	Total	acquisition	Production	Distribution	maintenance	End-of-Life
Global warming IPCC2013 GWP100a	kg-CO <sub>2</sub> eq	1.1E+04	2.8E+03	2.4E+02	3.6E+02	7.3E+03	7.6E+02
Acidification	kg-SO₂eq	7.9E+00	3.7E+00	8.6E-02	5.0E-01	3.5E+00	1.5E-01
Resources consumption	kg-Sbeq	1.5E+00	1.2E+00	1.1E-03	1.5E-03	3.4E-01	2.4E-04

2. Life cycle inventory analysis (LCI)					
Parameter		Unit			
Non-renewable material resources	6.8E+02	kg			
Renewable material resources	1.1E+03	kg			

3. Material composition						
Material		Unit				
SUS	16.7	kg				
Aluminum	24.1	kg				
Ordinary steel	413.8	kg				
Other metals	18.3	kg				
Thermoplastic resin	66.0	kg				
Thermosetting resin	7.0	kg				
Glass	5.0	kg				
Rubber	3.4	kg				
Paper	35.6	kg				
Lubricant	0.1	kg				
Mounting circuit board	5.3	kg				
Wood	1.6	kg				

#### 5. Additional explanation

-Products selected in the scenario used for load calculation -Printer (EP)

- Product destination: NA ※
- %Transportation scenarios are for China, Thailand, and Ricoh Group.from three production sites in Japan, North America, Europe, on transportation routes to the five poles of China, Oceania and Japan transport load calculate the weighted average of transportation activity per kg of product from the total calculated using the annual production volume for each pole .

Then, it is used as a transportation unit of calcuration.

- · Expected usage period: 5 years
- Estimated number of sheets:4,300,800 sheets \*\*
- \*Compatible with International Energy Star Program Ver.2.0
- -The load on the image output medium (printing paper) is not included.

<sup>\*</sup>Data derived from LCA and not assigned to the impact categories of LCIA



#### **Ecoleaf Environmental Labeling Program**

Sustainable Management Promotion Organization 2-1, Kaji-cho 2 chome, Chiyoda-ku, Tokyo Japan https://ecoleaf-label.jp/

Type III Environmental Declaration (EPD)
Registration number: JR-AI-21070E

#### 6-1. Supplementary environmental information

Compliant with the International Energy Star Program Ver.2.0. It also complies with the European RoHS Directive.

Assembly production of this product and production of the main parts, photoconductor and toner, are carried out at an ISO14001 certified

#### 7. Assumptions of secondary data used

IDEA v2.1.3 is used and registration data and JLCA data v1.10 are used.

#### 8. Remarks

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied. (Reference URL : https://ecoleaf-label.jp/regulation/)

Registration number: JR-AI-21070E