



Carbon Footprint of Products

CFP Declaration

Registration number : JR-AI-23163C

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan
<https://ecoleaf-label.jp/>

Canon Inc.

imageRUNNER ADVANCE DX 4935i Platen(For US)



※The Cassette Feeding Unit is excluded.Platen cover is included instead of ADF.

Functional unit

Per unit product

System boundary

■ final products □intermediate products

Raw Material acquisition, Production, Distribution, Use & maintenance, and End-of-Life stage

Main specifications of the product

Model name

imageRUNNER ADVANCE DX 4935i Platen(For US)

Specifications

- Multi Functional Printer (Electrophotography)
- BW
- Print Speed : Up to 35 ipm (LTR)
- Max paper size : 320x450mm(SRA3) (12 5/8"x17 3/4")
- Print/copy/scan/Duplex printing
- Weight: approx.59.7kg(Toner bottle not included)

Company Information

Canon Inc.

30-2, Shimomaruko 3-chome, Ohta-ku,
Tokyo 146-8501, Japan +81-3-3758-2111

Registration#	JR-AI-23163C
PCR number	PA-590000-AI-07
PCR name	Imaging input and/or output equipment
Publication date	7/7/2023
Verification date	6/30/2023
Verification method	System certificaion
Verification#	JV-AI-23163C
Expiration date	6/29/2028
PCR review was conducted by:	
Approval date	4/24/2023
PCR review panel chair	Masayuki Kanzaki Sustainable Management Promotion Organization

Third party verifier*

Hiroyuki Uchida

Independent verification of data & declaration in accordance with ISO/TS14067

internal external

*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-23163C



1. Quantification results, and contents of the declaration

CFP quantification unit :


Parameter			Unit
CFP Quantification results		850	kg-CO₂eq
Breakdown	Raw material acquisition	600	kg-CO ₂ eq
	Production	32	kg-CO ₂ eq
	Distribution	53	kg-CO ₂ eq
	Use & maintenance	82	kg-CO ₂ eq
	End-of-Life	82	kg-CO ₂ eq
Value on CFP mark		850	kg-CO₂eq
Unit for the value on CFP mark		Per unit product	

*Quantification results may slightly differ from the sum of the breakdown due to rounding of fractions.

3. Supplementary environmental information

- Complies with the EU RoHS Directive (2011/65/EU) and its amendments including 2015/863/EU.
- Manufactured at ISO 14001 certified factories.

2. Additional information

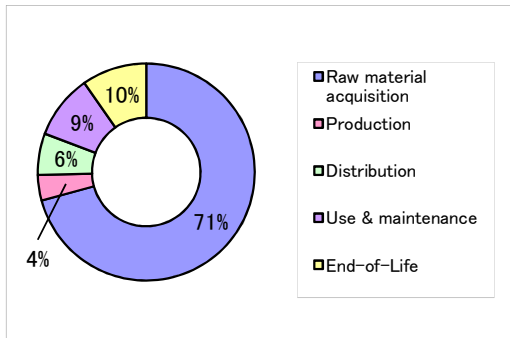

Calculated in the following conditions;

- Printing paper is not considered.
- The standard scenario for Multifunction Device (EP type).
- US market.
- Print volume: 182,400 sheets.
- The applied Energy Star program version is 3.0.

4. Interpretation

- CO2 emission in Raw material acquisition is the largest as 71%. It is important to reduce the size and weight, and to use low environmental impact materials.
 - CO2 emission in End-of-Life is the second largest as 10%. It is important to reduce the size and weight, and improving recycling rates.
 - We evaluated the CFP with Canon's own data of raw materials weight and the general basic unit for the parts because it is difficult to collect the data for a couple of thousands of parts. Accordingly, the results may be different from the specific product specification.
- As such, please be advised that this result would be a rough estimate.

5. Assumptions of secondary data used

C

IDEA v2.1.3, and registered data of Japan EPD Program by SuMPO, JLCA data v1.13 are used.

6. Remarks

-

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied. (Reference URL : <https://ecoleaf-label.jp/regulation/>)
- The CFP only addresses the single impact category of climate change and does not assess other potential social, economic and environmental impacts arising from the provision of a product.