



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24449E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization  
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan  
<https://ecoleaf-label.jp/>



A3 Color Multifunction Printer

ApeosPort-VII C7773

FUJIFILM

Value from Innovation

富士フイルム ビジネス イノベーション株式会社  
FUJIFILM Business Innovation Corp.

Apeos, Apeos logo and ApeosPlus are registered trademarks or trademarks of FUJIFILM Business Innovation Corp. in Japan and/or other countries.

### Functional unit

Per unit of product

### System boundary

■ final products       intermediate products

Raw material acquisition, Production, Distribution,  
Use & Maintenance, End-of-Life

### Main specifications of the product

- Model: ApeosPort-VII C7773
- Color Multifunction Printer (EP Type)
- Print Speed (A4 LEF): Color 70ppm, Monochrome 70ppm
- Paper Size (Max.): SRA3(320×450 mm)、  
12×18"(305×457 mm)、A3
- Copy / Print / Scan / Fax
- Automatic 2 Sided Output, Automatic Document Feeder

### Company Information

FUJIFILM Business Innovation Corp.

6-1 Minatomirai, Nishi-ku, Yokohama-shi, Kanagawa Japan

<https://www.fujifilm.com/fbglobal/eng>

Registration#	JR-AI-24449E
PCR number	PA-590000-AI-08
PCR name	Imaging input and/or output equipment
Publication date	2/27/2025
Verification date	2/18/2025
Verification method	System certificaion
Verification#	2024-FB-EL-049
Expiration date	2/17/2030
PCR review was conducted by:	
Approval date	9/1/2023
PCR review panel chair	Masayuki Kanzaki Sustainable Management Promotion Organization

### Third party verifier\*

Sachiko Hashizume

Independent verification of data & declaration in  
accordance with ISO14025


internal       external

\*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-24449E



1. Results of life cycle impact assessment (LCIA)

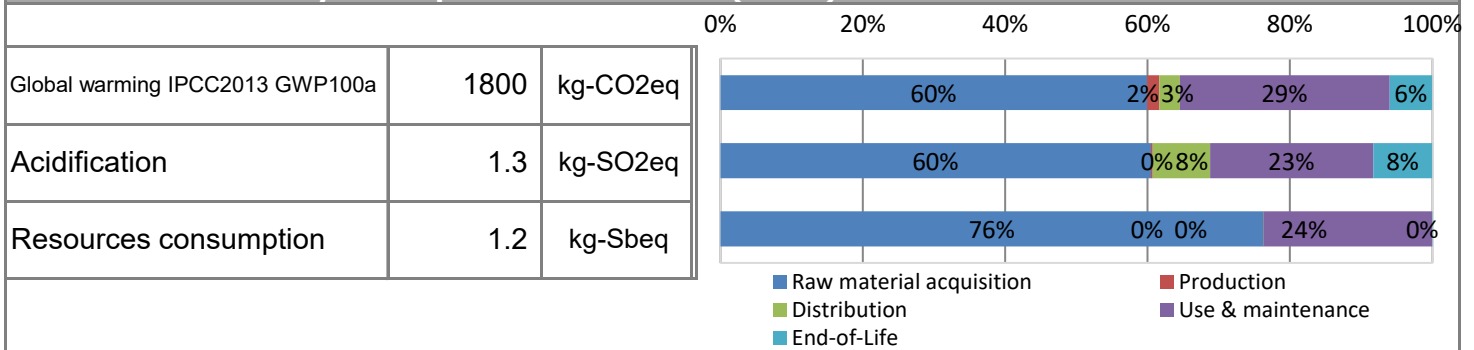

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO <sub>2</sub> eq	1.8E+03	1.1E+03	3.1E+01	5.2E+01	5.4E+02	1.1E+02
Acidification		kg-SO <sub>2</sub> eq	1.3E+00	8.1E-01	3.7E-03	1.1E-01	3.1E-01	1.1E-01
Resources consumption		kg-Sbeq	1.2E+00	9.4E-01	1.4E-04	2.3E-04	2.9E-01	2.0E-04

2. Life cycle inventory analysis (LCI)

Parameter	Value	Unit
Non-renewable material resources	1.5E+02	kg
Renewable material resources	4.0E+02	kg

3. Material composition

Material	Value	Unit
Steel	79	kg
SUS	1.2	kg
Aluminium	1.1	kg
Other Metals	8.3	kg
Plastic	45	kg
Rubber	0.082	kg
Glass	2.3	kg
Paper, Wood	8.3	kg
Circuit Board	5.4	kg
Conversion Parts	8.1	kg
Others	5.2	kg

5. Additional explanation

- Product destination: Japan
- Calculated based on standard scenario for MFP (EP type).
- Printing paper is excluded from Use & maintenance stage.
- The applied International ENERGY STAR® Program Version is 3.0.
- Assumed print volume are 729,600 sheets.  
1/4 x 32 (jobs per day) x 76 (sheets per job) x 5 (days) x 4 (weeks) x 12 (months) x 5 (years) = 729,600 (sheets)



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-AI-24449E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization  
14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan  
<https://ecoleaf-label.jp/>

#### 6-1. Supplementary environmental information

ENERGY STAR® Ver.3.0 qualified.

#### 7. Assumptions of secondary data used

Inventory Database: LCI Database IDEA v2.1.3, Japan EPD Program by SuMPO registered data v1.18.

#### 8. Remarks

-

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.  
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

Registration number : JR-AI-24449E