# Japan EPD Program by SuMPO

Sustainable Management Promotion Organization 14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan https://ecoleaf-label.jp/



# Color MFD TASKalfa MZ3501ci(US)

# KYOCERA Document Solutions Inc.

The impact of following options is not included.

ADF

Paper Feeder (× 2)

#### **Functional unit**

Per unit of product

# **System boundary**

■ final products □intermediate products

Raw material acquisition-Production-Distribution-

Use & maintenance-End-of-Life

#### Main specifications of the product

Model name : Color MFD

TASKalfa MZ3501ci(US)

Making Technology: Electrophotographic Printer (EP)

Printng Speed:

Monochrome 35 pages per minute in A4

Color 35 pages per minute in A4

Priting paper : Maximum A3

Duplex function: Standard ADF: Option Copy / Print / Scan / FAX (FAX: Option)

# **Company Information**

KYOCERA Document Solutions Inc.

Quality Assurance Division Reliability Assurance Section 21

TEL: 06-6764-3764

https://www.kyoceradocumentsolutions.co.jp

Registration#	JR-AI-24629E	
PCR number	PA-590000-AI-08	
PCR name	Imaging input and/or output equimpent	
Publication date	3/31/2025	
Verification date	3/12/2025	
Verification method	System certificaion	
Verification#	JV-AI-24629E	
<b>Expiration date</b>	3/11/2030	
PCR review was conducted by:		
Approval date	9/1/2023	
PCR review	Masayuki Kanzaki	
panel chair	Sustanable Management Promotion Organization	

# Third party verifier\*

Hiroyuki Uchida

Independent verification of data & declaration in accordance with ISO14025

□internal **■** external


Registration number: JR-AI-24629E

<sup>\*</sup>Auditor's name is stated if system certification has been performed.



#### Japan EPD Program by SuMPO

Sustainable Management Promotion Organization 14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan https://ecoleaf-label.jp/

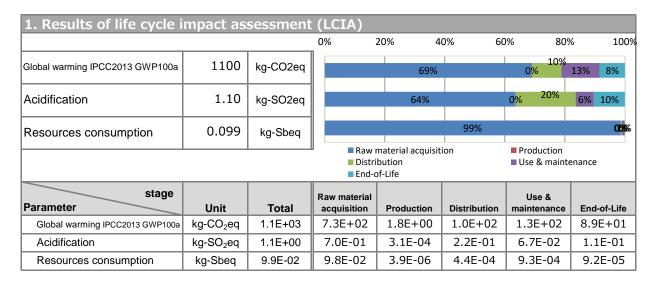

2. Life cycle inventory analysis (LCI)				
Parameter		Unit		
Non-renewable material resources	7.9E+01	kg		
Non-renewable energy resources	1.6E+04	MJ		
Renewable material resources	1.7E+02	kg		
Renewable primary energy	2.7E+02	MJ		

3. Material composition			
Material		Unit	
Steel	4.1E+01	kg	
SUS	2.6E+00	kg	
Cu	1.8E+00	kg	
Al	1.9E+00	kg	
Other metals	3.0E-02	kg	
Glass	2.4E+00	kg	
Thermoplastics resin	3.8E+01	kg	
Thermosetting resin	1.1E+00	kg	
Rubber	5.9E-02	kg	
Paper	1.2E+01	kg	
Wood	1.1E+01	kg	
Assembled circuit board	3.0E+00	kg	
Medium-sized motor	2.6E+00	kg	

# 5. Additional explanation

- · Product destination: North America
- · Calculation method of use stage (scenario)
- ①Expected usage period: five years
- ②Estimated number of sheets used:
- Monoclome 91,200 Color 91,200
- 3The impact of printing paper is not included
- Products selected in the scenario used for inventory calculation :
   Copier, Printer and Multifunction device (EP)
- Conformed to the International
  - ENERGY STAR® Ver3.2 Program
- Consumables will be shipped directly from the factory to the country of sale separately from the product body and all of them are accounted for in the use and maintenance



# Japan EPD Program by SuMPO

Sustainable Management Promotion Organization 14-8, Uchikanda 1-chome, Chiyoda-ku, Tokyo Japan https://ecoleaf-label.jp/

# 6-1. Supplementary environmental information

- · Conformed to the International ENERGY STAR® Program
- · Manufactured at ISO14001 certified factories.
- · Halogenated flame retardants are not used in Plastic housing and outer package.

# 7. Assumptions of secondary data used

IDEA v2.1.3 and Japan EPD Program by SuMPO Registry data v1.17

# 8. Remarks

\_

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied. (Reference URL: https://ecoleaf-label.jp/regulation/)

Registration number: JR-AI-24629E