



**SHARP**

Sharp Corporation

DIGITAL FULL COLOR MULTIFUNCTIONAL SYSTEM

**BP-51C36 (US)**

EXIT TRAY CABINET is optional,  
its impact is not included.

### Functional unit

Per unit of product

### System boundary

☒ final products ☐ intermediate products

Raw material acquisition, Production, Distribution,  
Use & maintenance, End-of-Life

### Main specifications of the product

Model name : BP-51C36

Marking technologies : Electrophotographic Printer (EP)

Print speed : Monochrome 36prints/minute (A4)

Full-color 36prints/minute (A4)

Maximum Paper Size : SRA3

Print/Copy/Scan : Standard

Duplex printing/ADF : Standard

### Company Information

SHARP CORPORATION

Smart Business Solutions BU

E-mail : ECOLEAF-BS@sharp.co.jp

Registration#	JR-AI-25241E
PCR number	PA-590000-AI-08
PCR name	Imaging input and/or output equipment
Publication date	09 October 2025
Verification date	22 September 2025
Verification method	System certification
Verification#	FV-08-25027
Expiration date	21 September 2030
PCR review was conducted by:	
Approval date	01 September 2023
PCR review panel chair	Masayuki Kanzaki Sustainable Management Promotion Organization

### Third party verifier\*

Shouko Hashizume


Independent verification of data & declaration in  
accordance with ISO14025

☐ internal ☒ external

\*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-25241E

## 1. Results of life cycle impact assessment (LCIA)

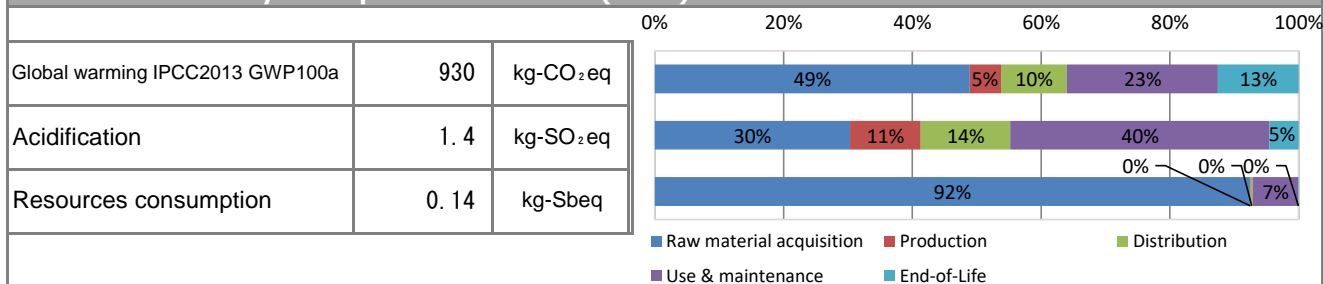

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO <sub>2</sub> eq	9.3E+02	4.6E+02	4.5E+01	9.6E+01	2.2E+02	1.2E+02
Acidification		kg-SO <sub>2</sub> eq	1.4E+00	4.4E-01	1.6E-01	2.0E-01	5.8E-01	6.5E-02
Resources consumption		kg-Sbeq	1.4E-01	1.3E-01	1.9E-04	4.0E-04	1.0E-02	1.3E-04

## 2. Life cycle inventory analysis (LCI)

Parameter	Unit
Non-renewable material resources	7.3E+01 kg
Renewable material resources	1.4E+02 kg

## 3. Material composition

Material	Unit
Steel	3.2E+01 kg
SUS	8.6E-01 kg
Aluminium	5.0E-01 kg
Other metal	9.3E-01 kg
Plastic	3.2E+01 kg
Rubber	1.2E-01 kg
Glass	2.1E+00 kg
Paper · Wood	1.4E+01 kg
Circuit Board	1.9E+00 kg
Others	6.3E+00 kg

## 5. Additional explanation

- Product destination: North America
  - Calculation method of use stage (scenario)
    - Expected usage period: five years
    - Estimated number of use : 192,000 sheets  
 $32 \text{ (Jobs/Day)} \times 20 \text{ (Sheets/Job)} \div 4 \times 5 \text{ (Days/Week)} \times 4 \text{ (Weeks/Month)} \times 12 \text{ (Months/Year)} \times 5 \text{ (Years)}$   
 $= 192,000 \text{ sheets}$
  - The impact of paper for printing is not included.
  - Products selected in the scenario used for inventory calculation : Multifunction device (EP)
- ※ Calculated according to the ENERGY STAR® Ver.3.0 program.

## 6-1. Supplementary environmental information

- Assembly and production of this product, as well as production of the photoconductor and toner, which are the main components, are performed at ISO 14001-certified factories.

## 7. Assumptions of secondary data used

IDEA v3.1.0 and Japan EPD Program by SuMPO Registry data v1.15

## 8. Remarks

-

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.  
(Reference URL : <https://ecoleaf-label.jp/regulation/>)
- This is a selfdeclared translation of EPD that can be accessed at <https://ecoleaf-label.jp/epd/2454> and is published for convenience purposes. Only the original EPD is valid and binding between parties.