



RICOH COMPANY,LTD (with FAX Unit Type M62 and Inner 1-Bin Tray BN3140)



### Functional unit

Per product

### System boundary

■ final products  intermediate products  
Raw material acquisition, Production, Distribution,  
Use & maintenance, End-of-Life

### Main specifications of the product

Product name: RICOH IM 6010  
(with FAX Unit Type M62 and Inner 1-Bin Tray BN3140)  
Main specifications:  
MFP (Electrophotography)  
Print Speed : Monochrome 60ppm (A4)  
Maximum Paper Size : A3  
Function: Print /Copy /Scan /FAX  
Included Units in Assessment :Automatic Reversing Document Feeder, Automatic Duplexing Unit

### Company Information

RICOH COMPANY,LTD  
<https://www.ricoh.co.jp/>

Registration#	JR-AI-25334E
PCR number	PA-590000-AI-08
PCR name	Imaging input and/or output equipment
Publication date	23 Dec 2025
Verification date	7 Nov 2025
Verification method	System certificaion
Verification#	JV-AI-25334
Expiration date	6 Nov 2030

### PCR review was conducted by:

Approval date	1 Sep 2023
PCR review panel chair	Masayuki Kanzaki (SuMPO)

### Third party verifier\*

Hiroyuki Uchida

Independent verification of data & declaration in accordance with ISO14025


internal  external

\*Auditor's name is stated if system certification has been performed.

Registration number : JR-AI-25334E



## 1. Results of life cycle impact assessment (LCIA)

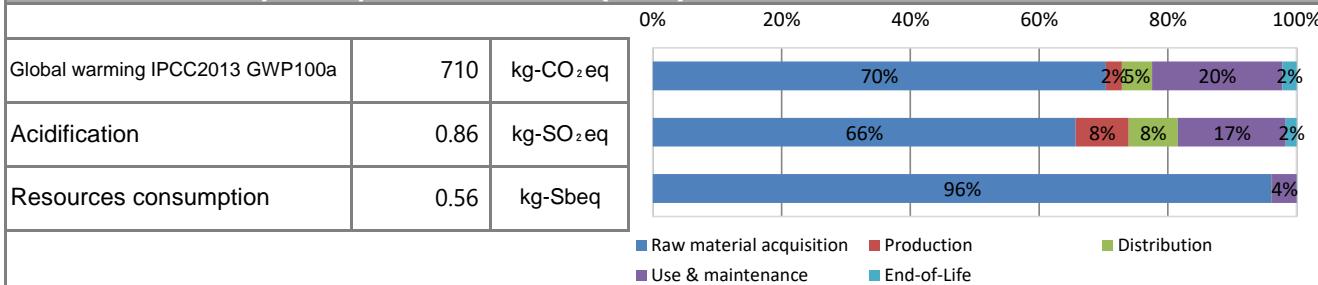

Parameter	stage	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a		kg-CO <sub>2</sub> eq	7.1E+02	5.0E+02	1.8E+01	3.3E+01	1.4E+02	1.6E+01
Acidification		kg-SO <sub>2</sub> eq	8.6E-01	5.6E-01	7.0E-02	6.6E-02	1.4E-01	1.5E-02
Resources consumption		kg-Sbeq	5.6E-01	5.3E-01	9.0E-05	1.4E-04	2.1E-02	4.4E-05

## 2. Life cycle inventory analysis (LCI)

Parameter	Unit
Non-renewable material resources	7.7E+01 kg
Renewable material resources	8.9E+01 kg

## 3. Material composition

Material	Unit
SUS	4.8E+00 kg
Aluminum	8.0E-01 kg
Ordinary steel	3.7E+01 kg
Other metals	6.4E+00 kg
Thermoplastic resin	3.7E+01 kg
Thermosetting resin	1.4E+00 kg
Glass	1.9E+00 kg
Rubber	7.6E-01 kg
Paper	2.4E+01 kg
Lubricant	1.5E-02 kg
Mounting circuit board	9.4E-01 kg
Wood	1.5E-02 kg
Other	3.7E-02 kg



## 5. Additional explanation

Products selected in the scenario used for load calculation

--MFP (Electrophotography)

- Product destination: JP
- Expected usage period: 5 years
- Estimated number of sheets: 537,600 sheets ※

※Compatible with International Energy Star Program Ver.3.0

-The load on the image output medium (printing paper) is not included.

## 6-1. Supplementary environmental information

Compliant with the International Energy Star Program Ver.3.0. It also complies with the European RoHS Directive.

Assembly production of this product and production of the main parts, photoconductor and toner, are carried out at an ISO14001 certified factory.

Certification number: JQA-E-70001, BSI-EMS765926

<https://jp.ricoh.com/sustainability/environment/management/iso>

## 7. Assumptions of secondary data used

IDEA v3.1.0, and registered data of Japan EPD Program by SuMPO v1.15 are used.

## 8. Remarks

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.  
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

Registration number : JR-AI-25334E