

Canon Inc.

imageFORCE C3135_DADF-E1(For EU)



※The Cassette Feeding Unit and the Inner Finisher are excluded.

Functional unit

Per unit product

System boundary

final products intermediate products

Raw Material acquisition, Production, Distribution,
Use & maintenance, and End-of-Life stage

Main specifications of the product

Model name: imageFORCE C3135_DADF-E1(For EU)

Specifications

- Multi Functional Printer (Electrophotography)
- CL
- Print Speed : Up to 35 ipm (A4)
- Max paper size : 320x450mm (SRA3)
- Print/copy/scan/Duplex printing/ADF
- Weight : approx. 86.0kg (Toner bottle is not included.)

Company Information

Canon Inc.

30-2, Shimomaruko 3-chome, Ohta-ku,
Tokyo 146-8501, Japan
+81-3-3758-2111

Registration#	JR-AI-26016E
PCR number	PA-590000-AI-08
PCR name	Imaging input and/or output equipment
Publication date	6/9/2026
Verification date	5/20/2026
Verification method	System certificaion
Verification#	JV-AI-26016
Expiration date	5/19/2031
PCR review was conducted by:	
Approval date	9/1/2023
PCR review panel chair	Masayuki Kanzaki Sustainable Management Promotion Organization

Third party verifier*


Hiroyuki Uchida

Independent verification of data & declaration in accordance with ISO14025

internal external

*Auditor's name is stated if system certification has been performed.

1. Results of life cycle impact assessment (LCIA)

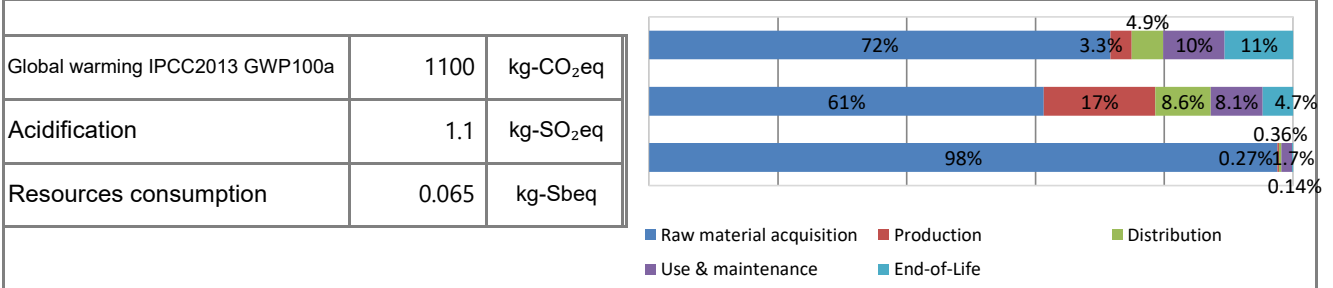

Parameter	Unit	Total	Raw material acquisition	Production	Distribution	Use & maintenance	End-of-Life
Global warming IPCC2013 GWP100a	kg-CO ₂ eq	1.1E+03	8.2E+02	3.8E+01	5.6E+01	1.1E+02	1.2E+02
Ozone layer destruction	kg-CFC-11eq	1.2E-04	1.1E-04	2.1E-06	1.3E-08	6.5E-06	8.6E-07
Acidification	kg-SO ₂ eq	1.1E+00	6.7E-01	1.9E-01	9.4E-02	8.8E-02	5.2E-02
Resources consumption	kg-Sbeq	6.5E-02	6.3E-02	1.7E-04	2.3E-04	1.1E-03	9.3E-05

2. Life cycle inventory analysis (LCI)

Parameter	Unit	Value
Non-renewable energy resources	MJ	1.7E+04
Renewable primary energy	MJ	8.9E+02

3. Material composition

Material	Unit	Value
Common Steel	%	31
Stainless Steel	%	0.68
Aluminium	%	0.44
Other Metal	%	1.8
Plastic	%	34
Rubber	%	0.57
Glass	%	2.4
Paper/Wood	%	18
Circuit Board	%	3.4
Others	%	7.1



5. Additional explanation

Calculated in the following conditions;

- Printing paper is not considered.
- Expected use period is 5 years.
- The standard scenario for Multifunction Device(EP type)
- UK / France / Germany / Italy / Spain / Portugal / Belgium / Netherland / Austria / Switzerland / Denmark / Sweden / Norway / Finland market.
- Print volume: 182,400 sheets.
- The applied Energy Star program version is 3.0.

We evaluated the Ecoleaf with Canon's own data of raw materials weight and the general basic unit for the parts because it is difficult to collect the data for a couple of thousands of parts. Accordingly, the results may be different from the specific product specification. As such, please be advised that this result would be a rough estimate.

6-1. Supplementary environmental information

Complies with the EU RoHS Directive (2011/65/EU) and its amendments including 2015/863/EU.
Manufactured at ISO 14001 certified factories.

7. Assumptions of secondary data used

IDEA v3.1, and registered data v1.15 of Japan EPD Program by SuMPO are used.

8. Remarks

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.
(Reference URL : <https://ecoleaf-label.jp/regulation/>)
- This is a selfdeclared translation of EPD that can be accessed at JR-AI-26016E and is published for convenience purposes. Only the original EPD is valid and binding between parties.